




EQUIPMENT CATALOG v2.1



Equipment | Sales | Service
800-243-3418 • profastinc.com



Safety



Equipment

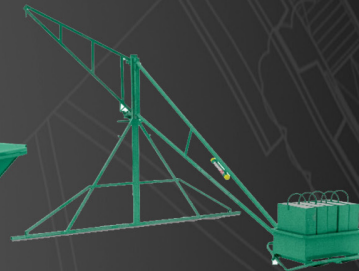

Heat Welding




Generators



Application



Application Equipment




EVERHARD

QMS REGISTERED TO ISO 9001

Wooden Handle Silicone Seam Rollers

Part Number	2" x 4"	MISSEAMROLLER2X4
	2" x 2"	MISSEAMROLLER2X2
	1 5/16" x 1 3/4"	MISSEAMROLLER1516

- Rollers come standard with 5" wood handle, enclosed bearings, and either a single or double fork, which secures the roller head into the handle.
- Most models are available with ERGONOMIC features including cushion-grip handles, and extended offset forks.
- Made in USA



EVERHARD

QMS REGISTERED TO ISO 9001

Roll-N-Chek Seam Roller

Part Number	1 7/16" x 1 3/4"	MISSEAMRO5032
-------------	------------------	---------------

- Seam tester fitted into other end of roller lets you quickly and easily check seams right after rolling them out.
- Increases quality and efficiency of welded seam work AND saves you time and money on every job
- Combo tool stays well balanced in your hand, letting you roll out the seam and immediately test with no "pick up and put down" of different tools.
- Versatile seaming tool performs many roofing tasks: ROLL - TEST - TAMP - PROBE.
- Made in USA




EVERHARD

QMS REGISTERED TO ISO 9001

Chek-N-Fold Seam Tool

Part Number	MISSEAMMM21120
-------------	----------------

- Folding probe for easy storage
- Test probe locks into position
- No accidental damage to roofing membrane or self
- Heat-treated steel extension, 3-1/4 in.
- Ergonomic grip handle



EVERHARD

QMS REGISTERED TO ISO 9001

Silicone Seam Rollers

Part Number	1 7/16" x 1 3/4"	MISSEAMROLLER5029
-------------	------------------	-------------------

- Rollers come standard with 5" wood handle, enclosed bearings, and either a single or double fork, which secures the roller head into the handle.
- Most models are available with ERGONOMIC features including cushion-grip handles, and extended offset forks.
- Made in USA



EVERHARD

QMS REGISTERED TO ISO 9001

Convertible Seam Tester

Part Number	MISSEAMPROBE10250
-------------	-------------------

- Test seams to make sure they hold properly
- Locate loose portions of seams for rework
- Hand-held seam testers good for detail work in small areas
- Stand-up seam testers are ideal for general finishing work and final seam checks



EVERHARD

QMS REGISTERED TO ISO 9001

Insulation Knife

Part Number	MISISOKNIFE450
-------------	----------------

- The new 3-5/8" long blade lets you cut through thicker insulation.
- The precision ground blade is double-beveled on all three edges.
- Hardened and tempered for strength, the blade stays rigid, but is flexible enough not to break.
- 7 1/2" overall length
- 3 5/8" beveled high carbon spring steel blade
- Plastic, non-rollaway handle

Application Equipment



Nylon "V" Roller

Part Number	2" x 7/16"	MISSEAMMR12540
-------------	------------	----------------

Everhard's detail "V" rollers provide greater ease in seaming tight angles and performing detail work around fixtures and in corners. 5" hardwood handle and enclosed bearings provide balance and smooth rolling action. Our single-end detail "V" rollers have hubs that taper to a 5/64" rounded edge radius that won't cut membrane material

- Roller made from durable nylon



Membrane Slitter

Part Number	Slitter	TOL-EHMM21100
	5pk Blades	TOL-EHMM21105

- For TPO and PVC membranes
- Lightweight and compact
- Bottom guide slides under membrane and forces membrane into cutting blade
- Sloping nose allows easy tracking of cutting line
- Blade safely mounted in secure housing
- Easy to replace and rotate blade
- Replacement blades available (sold separately in 5 packs)
- Use three hole slitter blades



Ergonomic Handle Shear

Part Number	TOL-EHDC65915
-------------	---------------

- Carbon steel trimmers have chrome over nickel plating
- Shears will easily cut rubber, cord, and multiple layers of fabric
- Ergonomic handle
- Large ring extended bottom handle for added cutting leverage
- 10" bent trimmer with offset handles



Non-Stick Bent Shear

Part Number	TOL-EHDC66000
-------------	---------------

- Made with a new specialized industrial release coating
- Unmatched non-stick surface: industrial release coating has superior no-stick characteristics, no other shear comes close, adhesives and tapes pull off easily
- Shears are hot-forged, through-hardened carbon steel, providing durability and longer-lasting sharp edges
- Large comfortable handles fit all hand sizes
- Shears are 10" bent trimmers, with offset handles - great for cutting roofing materials (including peel-and-stick tapes) and the 10" blades are ideal for long straight cuts



10" Bent Shear Trimmer

Part Number	TOL-EHD65990
-------------	--------------

- 10" bent trimmer with offset handles
- Multi-purpose stainless steel shears
- These shears do heavyweight work but weigh less
- Can be used right or left handed
- Stamped, stainless steel blades are precision-ground and heat-treated
- Comfortable blue molded handles

Axes



STIHL®

Stihl Forestry Hatchet

Part Number	STHL-70108811908
<ul style="list-style-type: none"> •Premium ash handle •Well-balanced cutting head •Compact design measures 15.75" with a 1.3 lb. cutting head 	



STIHL®

Stihl Universal Forestry Axe

Part Number	STL-70108811907
<ul style="list-style-type: none"> •5-piece head attachment system that's up to 2.5 times stronger than a traditional axe head connection •Head is forged from premium C60 steel for higher durability •Extra-large striking face for improved splitting performance 	



Valley®

Valley 1 1/4 lb. Hatchet

Part Number	HATCHET125
<ul style="list-style-type: none"> •Drop forged and tempered S2 tool steel •Fully polished heads •Manufactured to exceed ANSI/ASME specifications •Short handle for portability and control •Heat treated and tempered 	



Valley®

Valley 3 1/2 lb Single Bit Axe

Part Number	AXE36H
<ul style="list-style-type: none"> •Drop forged and tempered S2 tool steel heads •Manufactured to exceed ANSI/ASME specifications •36" Hickory handle 	

Blowers



SINCE 1909
LITTLE WONDER®
Professionals Demand Little Wonder.™
HONDA
ENGINES

9hp Little Wonder Blower

Part Number	EQPLW-92700201
<p>Optimax maximum output blowers are perfect for moving leaves, debris and standing water—or for any job that requires hurricane-force air. As always, our blowers feature a patented, split airstream discharge, which moves debris at the top and bottom of the pile, eliminating “blowback”. And thanks to our new design, you the operator have control of the split-stream deflector at the handle, which means no more manual shifting.</p>	
Engine	Honda GX270
Number of Blades	7 Blade Reverse Angle
CFM (Cubic Feet/min)	2260



SINCE 1909
LITTLE WONDER®
Professionals Demand Little Wonder.™
HONDA
ENGINES

13hp Little Wonder Blower

Part Number	EQPLW-93900201
<p>Optimax maximum output blowers are perfect for moving leaves, debris and standing water—or for any job that requires hurricane-force air. As always, our blowers feature a patented, split airstream discharge, which moves debris at the top and bottom of the pile, eliminating “blowback”. And thanks to our new design, you the operator have control of the split-stream deflector at the handle, which means no more manual shifting.</p>	
Engine	Honda GX390
Number of Blades	7 Blade Reverse Angle
CFM (Cubic Feet/min)	2530

B.U.R./Hot



30 Gallon BIM Cart w/Removable Handle

Part Number	RMP-502400
Oversized fenders protect tires. The Bim Cart has a 14" Loading height. Front and back heel plates stabilize the cart and balance the load. 4.00 x 8 No Flat Tires with roller bearings provide smooth rolling on roof surface. 360 Degree Splash lip prevents "Hot" from sloshing out of tub. Mop Drag Bar included.	



Universal NFL Alum. Feltmaster

Part Number	RMP-514020
All aluminum construction for light weight. Switch from 36" to 40" quickly. Use 5 or 7 square goods at a single pass. Includes control to apply a brake to one wheel while lifting the lower paper roller for easy threading of paper. Adjustable valve to be able to vary the amount of hot delivered to the deck. Asphalt valve at the rear so that the operator can watch for voids to eliminate potential leaks. Lids seal with silicone gasket to help reduce spilled asphalt. Note: Make sure there is a spotter to broom in the felt and observe the path of the operator in case of an unguarded skylite or roof edge. This unit has an insulation covering on the outside to conserve heat. This unit has Non-Flat Lite tires for less maintenance.	



55 Gallon Insulated NFL Hotmaster

Part Number	RMP-512605
Once it's hot, keep it hot - the HOT-MASTER is constructed using a pressure-tested steel drum, mounted on a well-balanced cart with three 400x8 Non-Flat Lite tires, one a locking swivel wheel. Insulated model is covered with 2" thick fiberglass and set inside a sheet metal outer shell. Includes a 2.5" Draw-off Valve set 27" above ground level. Note: 110 Gallon hot luggers are available on special order. Note brake detail. By locking the swivel wheel at a 90 degree angle, the Hotmaster will not roll off the roof.	



Lite Wall Hot Pipe

Part Number	5'	RMP-57105L
	10'	RMP-57110L
	15'	RMP-57115L
	20'	RMP-57120L
Roofmaster Lite Wall Tubing safely transports "hot" to the roof. Made from 1.75" steel tubing with welded couplings and hoist eye. Just take a hammer to tighten or loosen the connection. Available in 5', 10', 15' or 20' and 45 degree, 90 degree and 120 degree transitions.		

B.U.R./Hot



5' Rubber Flex w/Stock Union

Part Number	RMP-551705
Special Heat-Resistant Rubber Flex Hose is 1.5" in diameter. Used as the transition from the hot pipe to the bucket or hot lugger (Hotmaster). This features a Stockham Equal Union.	



5 Gallon Bucket w/Side Handle

Part Number	RMP-250122
Roofmaster buckets are specifically designed for handling hot asphalt; and meet OSHA specifications for carrying elevated temperature materials. They are made of 24 gauge steel with a rolled rim, reinforced at the bottom and have a 5/16" round drop bail.	



5 Gallon Bucket

Part Number	RMP-250222
Roofmaster buckets are specifically designed for handling hot asphalt; and meet OSHA specifications for carrying elevated temperature materials. They are made of 24 gauge steel with a rolled rim, reinforced at the bottom and have a 5/16" round drop bail that remains away from the side so that it is cooler than the side of the bucket.	



Roofers Pitch Hood

Part Number	RMP-414020
Breathable dacron material protects workers from pitch fumes. Complete face and neck coverage. Lightweight and washable. Use over and over again. Will not stretch out.	



#273 Adjustable Pouring Pot w/Screen

Part Number	RMP-252730
Designed for convenient, narrow strip pouring (vertical or horizontal). Removable and adjustable spout is 4" wide, with basket screen, safety splash hoods, comfortable full length pouring handle, flush skid bottom and oval shape.	



4" Steel Roller with Stand Up Frame

Part Number	RMP-774024
4" wide single roller. Use as a Stand Up type for "easy-on-the-back" rolling, or Hand type roller for vertical rolling. Uses 1-1/4" Mop Handle (not included)	

B.U.R./Hot



2 1/2" Drawoff Cock

Part Number	RMP-803240
Replacement 2-1/2" drawoff valve for a Roofmaster kettle. Will also work on any asphalt kettle with a 2-1/2" weld flange on the vat. These include Reeves, Panther, Cleasby, Garlock and All Seasons. Internal opening, so that when valve is closed, the asphalt drains so that the valve does not require thawing to operate.	



1-1/2" WARD Hammer On Union

Part Number	RMP-657213
Roofmaster Hammer On WARD style union for Lite Wall Tubing. NOTE: This will ONLY fit a WARD pattern union.	



4" Stem Dial Thermo

Part Number	RMP-231750
All stainless steel head, bezel and mounting. Convex window standard. Attached by 1/2" NPT nut. Stem is 18-8 Type 304 stainless steel, .250 diameter. Length of 4". Head is 2 1/4" diameter. Popular kettle thermometer.	



Kettle Skimmer

Part Number	RMP-530100
Use the Roofmaster Kettle Skimmer to skim the carbon junk that forms on the top of a asphalt kettle. Help keep the kettle clean. Made from sturdy metal tubing with an expanded metal screen, bordered with 1/4" steel for strength.	



5' Insulated Flexmetal Hose

Part Number	RMP-551515
Insulated Flexmetal Hot Asphalt Hose features unions on one end (only MCOE). Comes with a 1-1/2" Male Pipe nipple so that you can install your own union. Hose is covered with insulated silicone covering.	



GRIZZLY
GRIZZLY EQUIPMENT
1-888-325-9953

36" Gravel Spreader


Part Number	GRZ-110000
The GRIZZLY manual gravel spreader is 36" wide and will hold 6 cu. Feet of either pea gravel or large ballast rock. The adjustment of the dispensing door is simple and the handle is removable for storage. The rear wheel is offset for operator comfort. Easy to push and operate, the manual spreader is a mate to the mini mopper. Wheels: 400 X 4-80-8	

Carts



4Wheel Trailer

Part Number	RMP-505410
<p>Heavy Duty Material Trailer!! 30"x60" deck dimensions with Heavy duty 2" channel frame. 22" deck height. It comes with both 18x850 Pneumatic tires or Non-Flat Lite tires. Self adjusting drop brake with "T" handle for easy pulling. Stake pockets for channel riser and corner pin pockets for rolled goods. Pins included with attaching chains. Roller bearings in wheels for smooth rolling. Open back frame for hoisting fork or forklift access. Rear hitch and front pin hitch for the ability to form train of trailers. Pins included. 2000 lbs capacity.</p>	



Insulation Carrier

Part Number	RMP-506210
<p>Roofmaster has designed this insulation carrier cart to maximized loading efficiencies on-ground or on-deck with the least amount of effort by the operator. A 3-position slider allows the operator to change the angle of the load based on weight, size & height of the man. It is capable of carrying ISO board, plywood or other large sheet goods of several hundreds of pounds (over 600)! Fold-up forks allow for easy transportation & storage.</p>	



Insulation Carrier w/Back Wheels

Part Number	RMP-506225
<p>Roofmaster has designed this insulation carrier cart to maximized loading efficiencies on-ground or on-deck with the least amount of effort by the operator. A 3-position slider allows the operator to change the angle of the load based on weight, size & height of the man. It is capable of carrying ISO board, plywood or other large sheet goods of several hundreds of pounds (over 800)! Fold-up forks allow for easy transportation & storage. It's available with either 2-wheels or 4-wheels (4-wheel model recommended for greater flexibility) and the rear wheels are removable if desired. Side-to-side sliding rear wheels make turning with heavy loads easier on the operator. Roofmaster Insulation Carrier with (2 each) 18x8.50 Pneumatic Tires and (2 each) rear 4.00x8 Pneumatic tires.</p>	



55 Barrel Holder Assembly for Trailer

Assembly Part Number	RMP-505200
Barrel Part Number	RMP-512610
<p>Attachment for a 55 gallon Hot Asphalt barrel that allows the contractor to move asphalt around the rooftop on a 4 wheel trailer. Barrel sold separately.</p>	



Dump Hopper and Bracket

Part Number	RMP-505100
<p>Bolts on to our Universal 4-Wheel Trailers. Includes mounting bracket. Allows the contractor to load or unload gravel, tear off or trash and then dump into a trash chute by lifting on the long end of the hopper. Capacity is approximately 14 cubic feet. NOTE: trailer shown, but not included.</p>	

Carts



Roof Zone Trailer

Part Number	RMP-65018
Roofing trailer for moving felt, tear off debris, deck materials and other big loads. Features:	
<ul style="list-style-type: none"> •Steel tube design •30" Wide frame •72" Overall length •2,000 lb. capacity •18" heavy duty tires •Dead-man brake •Coupling hitch 	



Grizzly Voyager 1 Propane Transport

Part Number	GRZ-220000
A safe and easy way to transport a 100 lb propane tank to and around the roof. The single voyager was designed to carry one propane tank securely nestled inside its frame and held in place by chains. Hooks are provided to keep your torch and hose from dragging on the roof. You can even carry a fire extinguisher. Features a lifting ring to safely lift the voyager 1 and tank to the roof and a bent lip to avoid damaging the roof membrane.	



Grizzly Workhorse Power Buggy

Part Number	GRZ-330000
Equipped with a GX160 Honda engine, this Workhorse can handle a number of jobs. The Gravel spreader attachment will spread large or pea gravel. The dump tray attachment is used for moving debris or material and the hot tank will supply hot asphalt on larger jobs. The GRIZZLY Workhorse has an independent brake and clutch mechanism that can be easily adjusted.	



Grizzly Insulated Hot Tank 55 Gallon

Part Number	GRZ-145500
GRIZZLY insulated tanks are manufactured using all new materials, not recycled 55 gallon drums. All our tanks are water tested for leaks before they are insulated and jacketed.	



Grizzly Dump Tray for Workhorse Power Buggy

Part Number	GRZ-330700
Dump Tray attachment for the Grizzly Workhorse Power Buggy	



Grizzly Gravel Spreader for Workhorse Power Buggy

Part Number	GRZ-330500
Gravel Spreader attachment for the Grizzly Workhorse Power Buggy	


Carts



Grizzly G41 Mini Loader

Part Number	GRZ-410000
-------------	------------

The G41 is the lightest machine in its class, while being very powerful. Its CH20S Kohler engine offers tons of torque and a 2 year commercial warranty. It is also equipped with a universal attachment adaptor that allows the use of dozens of accessories.



Grizzly G41 Roof Remover

Part Number	GRZ-413000
-------------	------------


This roof remover attachment will lift the old material over its back plate to allow the material to be picked up at a more comfortable height, to be discarded into trailer or workhorse



Grizzly G41 Fork Attachment

Part Number	GRZ-414000
-------------	------------

An interesting addition to your G41. An efficient way to transfer skids of light material, rolls, bundles of whatever can be loaded onto or picked up by these forks. Forks slide side to side to adjust to your needs. Back guard is removable.



Grizzly G41 Bucket

Part Number	GRZ-410100
-------------	------------

The bucket attachment for the Grizzly G41 Mini Loader.



Garlock R800 Workhorse

Part Number	GAR-301363
-------------	------------

If you have big areas to cover, this is the machine for you! Moving men and materials across large areas quickly and efficiently is key to productivity and profits.

- Carries most 600 Workhorse attachments
- 5 mph high speed
- Short turning radius, both forward and in reverse
- 36" model
- Controls within easy reach
- Automatic brake for safety
- 11-hp Honda engine

*Shown with Optional Fork Attachment



#36 Deep Dump Box

Part Number	GAR-404804
-------------	------------

600 Deep Dump Box for Garlock R800 Workhorse

Carts



Garlock Smart Cart

Part Number	GAR-301372
<ul style="list-style-type: none"> •A great 2-wheeled small carrier for materials, tools, and equipment •Hauls insulation and roll goods •Optional plastic lined debris tray for moving large pieces of tearoff •700-lb. capacity •The Smart Cart has two (2) 4.00 x 8 x 1" tires •Weighs only 74 lbs. for moving things quickly <p>*Shown with optional Dump Tray attachment</p>	




Garlock Insulation Fork

Part Number	GAR-400847
<ul style="list-style-type: none"> •Transport palletized loads in one pass •Moves rolls of rubber, felts, or a variety of materials •Forks are 21" on center x 32" long—perfect for standard 36" pallets •600-lb. capacity •Four (4) 4.10 - 3.50 x 6 x 1 	



Garlock Little Giant Trailer

Part Number	GAR-400016
<ul style="list-style-type: none"> •Ideal for moving rolls of felt or bundles of insulation, carrying hot tanks, or hauling debris •Large 18" x 8.50" 4-ply tires offer stability, load disbursement, and low compaction ratios •Drop handle brake •30" x 60" bed offers a 2000-lb. capacity •Can be towed together 	



Garlock Low-Boy Pro Carrier

Part Number	GAR-301369
<p>High capacity off-loading, unload up to 2,500 lbs of project materials right from delivery trucks to the carrier. Save time and money by making fewer project material handling trips, with the ability to move more ISO board bundles, heavy rolled goods, and other heavy items at one time.</p> <ul style="list-style-type: none"> •Integrated load foot brake •Heavy Duty plated rollers •Rear ramp •Large front storage box •HD flat-free tires •When handle is lowered, wheel travel is stopped 	



Garlock E-Z Roll Carrier


Part Number	E-Z Roll Carrier	GAR-300644
	Optional 5' extension	GAR-402525
<p>Transporting and laying down large, bulky rolls of rubber roofing material has never been easier than with Garlock's E-Z Roll Carrier. Our sturdy slide tube spindle and versatile dollies do most of the work for you, so you can finish your roll jobs quickly and safely. The E-Z Roll Carrier can handle rolls up to 134". Add the optional 4' extension to fit rolls up to 182". The versatile dollies swivel, so you can always find the best angle for lifting and moving even the heaviest rolls. Plus, they rest backwards on a support brace to hold rolls off the ground unattended.</p>		

Chutes



Gravel and Trash Chute

Part Number	RMP-588000
<p>Roofmaster Trash Chutes help eliminate dust and the danger of flying debris as well as costly jobsite clean-up. Made of high quality UV-resistant material, these trash chutes are durable light-weight and can be stored flat to save space. Each trash chute section is 30" diameter, 48" in length. Since each section tapers into the next section, calculate approximately 44" per section to determine number of chutes needed. Chutes lay flat for easy storage or transportation. Note: OSHA Regulation 1926.252 requires the use of an enclosed chute whenever materials are dropped more than 20 feet to any point lying outside the exterior walls of a building.</p>	



Trash Chute Hopper

Part Number	RMP-589100
<p>This hopper is designed with an all steel trapless funnel, eliminating the need to fabricate plywood sides. Features heavy-duty all-steel construction; hopper measures 54.5" x 52.5" x 32" and uses 4" x 6" or 4" x 4" wood or steel for support to rooftop. Note: OSHA Regulation 1926.252 requires the use of an enclosed chute whenever materials are dropped more than 20 feet to any point lying outside the exterior walls of a building. When figuring the weight load for supporting beams, take into consideration that each trash chute weighs 30#.</p>	

Cutting Blades



QUAD Blade w/ 1/4" Carbide

Part Number	RMP-581255
<p>A revolutionary new design concept makes this one of the most efficient, longest-lasting blades in the industry. 90% of the carbide tip cuts, where most other blades only utilize about 60% of the carbide tip. The 12" Quad Blade will give a longer blade life than single carbide blades by 2-4 times. Fit all makes and models of power roof saws. Cutting depth of 2-1/4". Roofmaster offers an exclusive limited warranty on the bonding of our carbide inserts to the steel blade. This model features 1/4" carbide.</p>	



Carbide Blade w/ 1/4" Blank

Part Number	12"	RMP-581205
	14"	RMP-581405
<p>Roofmaster 12" Carbide Blades give you the most economical cut on the roof deck! 1/4" carbide tip offers a quality cut. Roofmaster's high carbon steel blades are laser cut and the 1/4" carbide inserts are induction welded for extra strength and impact resistance. Cutting depth of 2-1/4". Roofmaster offers an exclusive limited warranty on the bonding of our carbide inserts to the steel blade.</p>		



Super Six w/ 1/4" Carbide

Part Number	RMP-581265
<p>18,000 carbide contacts to the roof per minute makes this the most powerful blade in the industry. This blade performs with more power, more efficiency, and less vibration. Will outlast most single blades 3-5 times longer. Fits all makes of roofing saws. Roofmaster offers an exclusive limited warranty on the bonding of our carbide inserts to the steel blade. Roofmaster's philosophy is the more carbides, the finer the cut and less vibration as there is more surface hitting the roof deck. This model features 1/4" carbide and is 12" in diameter. Cutting depth of 2-1/4".</p>	

Generators



WINCO
HONDA
ENGINES

Winco WC5000H Portable Generator

Part Number	WIN-WC5000H
<ul style="list-style-type: none"> •Honda GX270 •Low oil protection •Cast iron cylinder sleeves •CARB and EPA approved •100% copper windings •Switchless full power •2 NEMA 5-20 duplex receptacles •NEMA L5-20R receptacle •NEMA L14-30 receptacle •NEMA 5-50R receptacle •Made in the USA •Large 7 gallon, non-corrosive fuel tank •Conserv-R automatic idle control •Hour meter •USFS spark arrestors •Receptacles GFCI procted via a mainline •GFCI breaker 	



WINCO

Winco 10000VE Portable Generator

Part Number	WIN-WC10000VE
<ul style="list-style-type: none"> •Durable Briggs & Stratton commercial engine •Cast iron cylinder sleeves •EPA and CARB approved •Electric and Recoil start •Clean power at less than 5% total harmonic distortion •Steady voltage regulation is safe for sensitive electronics •Heavy duty capacitors and diodes •100% copper windings •Large 7 gallon fuel tank •Oversized full power plug (NEMA 14-60) matches other WINCO Big Dog models •Industrial Square D mainline circuit breaker •Industry leading 1/60th second reaction time •Visi-Trip indicator •30 amp receptacle is independently GFCI protected from NEMA 5-20 receptacles •Made in USA 	



WINCO
HONDA
ENGINES

Winco 12000HE Portable Generator

Part Number	WIN-WL12000HE
<ul style="list-style-type: none"> •Honda GX630 engine •Cast iron cylinder sleeves •Fuel efficient design •EPA and CARB approved •Electric start •Steady voltage regulation is safe for sensitive electronics •Heavy duty capacitors and diodes •100% copper windings •Large 15 gallon fuel tank •Oversized full power plug •Industrial Square D mainline circuit breaker •Made in USA 	



WINCO

Winco 18000VE Portable Generator

Part Number	WIN-WL18000VE
<ul style="list-style-type: none"> •Briggs & Stratton Vanguard engine •Cast iron cylinder sleeves •Electric start Generator •Clean power at less than 5% total harmonic distortion •Steady voltage regulation is safe for sensitive loads •Heavy duty capacitors and diodes •100% copper windings •Large 15 gallon, non-corrosive fuel tank •Oversized power plug •Industrial Square D mainline circuit breaker •Industry leading 1/60th second reaction time •Visi-Trip indicator •Made in the USA 	

Generators



WINCO
HONDA
ENGINES

Winco 3000H Portable Generator

Part Number	WIN-W3000H
-------------	------------

- Honda GC160 engine
- Standard low oil protection
- CARB and EPA approved
- 100% copper windings
- 2xNEMA 5-20 GFCI outlets
- 120V output
- Carry handle allows the generator to be carried like a suit case
- Two lifting eyes included standard
- DuPont powder coat paint provides durable finish that helps protect the generator from the elements
- Large rubber feet



Cables and Plugs

- 100' 10/3 cord
- Available in
- Cord with no plugs
 - Cord with female outlet - recommended when not using Sievert
 - Cord with male & female outlets - recommended use with Sievert
- Plugs available
- Male plug - twist lock
 - Female plug - twist lock
 - Male plug - straight body plug

Heat Welding




SIEVERT

TW 5000

Part Number	TOLSVRT-TW5000
-------------	----------------

- The Sievert TW 5000 can weld any membrane: Such as plastic, rubber, and modified bitumen.
- Four-wheel drive and belt system for wrinkle-free welding
 - Powerful engine
 - Digital display unit for control
 - Runs on 400 V or 230 V
 - Powerful fan for high-speed welding
 - Automatic start/stop sensor




BAK

LarOn Automatic Heat Welder

Part Number	BAK-5115995
-------------	-------------

- Pivoting guide bar
- Perfectly balanced
- Wrinkle-free welding
- Easy maintenance because of standard components
- Digital display showing temperature and speed
- Automatic drive start system
- Designed for the most demanding job sites
- For welding of roofing membranes and tarpaulins
- High speed production

Heat Welding



BAK

RoofOn Roof Welding Machine

Part Number	BAK-6600132B
<ul style="list-style-type: none"> •For welding of thermoplastic roofing membranes •Stepless adjustment of speed, air flow and temperature with potentiometer •Automatic drive start system •Fail-proof •Wrinkle-free welding •Seam width 40 mm 	



BAK

ErOn Hot Air Blower

Part Number	BAK-6600004
Perfect for: <ul style="list-style-type: none"> •Shrinking •Drying •Soldering •Heating •Activating •Welding •Bending 	



BAK

RiOn Hot Air Welding Gun

<ul style="list-style-type: none"> •Optimal performance / best price •Stepless adjustment of electronic controlled temperature •Easy welding with ergonomic handle •Maintenance friendly •High quality •Large accessories range 	
Available Packages:	
40mm Nozzle/Metal Case	BAK-5100726NB
40mm Nozzle Only	BAK-5100726N
RiOn Gun Only	BAK-5100726
Gun/Metal Case	BAK-6600160



BAK

BAK Accessories

Power Cord for RiOn	BAK-5528H
Heating Element for RiOn	BAK-5100702
Heating Element for LaRon	BAK-5107612
Mica Tube	BAK-100297
40mm Nozzle	BAK-5107132
20mm Nozzle	BAK-5107123
20mm Nozzle, 90°	BAK-5107124
20mm Nozzle, 60°	BAK-5107125
Handle for RiOn	BAK-6601026
Air Filter for RiOn	BAK-100258
Air Dam Belt for LaRon	BAK-104224
Metal Toolbox	BAK-5201000
Potentiometer	BAK-6601030

Hoisting



Round Rung Laddermaster Wheel

Part Number	RMP-541400
Roofmaster ladder-mounted hoisting wheels are designed to stay in place on any two rungs of a ladder without swaying or wobbling. The handle is 24" from the ladder mounting point for extra clearance for bigger, bulkier lifts. Use with 3/4" rope only. This is to be used on a Round Rung Ladder (usually wood) Made in the U.S.A.	



MODULAR HVAC Jack Set 13" Lift

Part Number	RMP-509945
This MODULAR HVAC Jack Set is a must when larger units need to be lifted. Roofmaster has re-engineered this popular item to make shipping a unit easier. Includes all bolts, washers and lock-washers for final assembly. The higher 13" lift also allows easier access for roofing. Maximum Lift Capacity: 2000 lbs. Maximum Lift Travel: 13". Maximum extension: 11 feet (using extensions provided with unit).	



Hoisting Wheel


Part Number	RMP-541200
All Roofmaster Hoisting Wheels feature the highest quality die-cast aluminum wheels. These wheels are made in the U.S.A. Incorporate that with maintenance-free bearings, plus an all-steel framework. Traditional gin wheel has an extra-heavy-duty forged swivel hook with safety clip You can tap the wheel and it has a ring, not like imported or yellow imitation "sand casted" wheels that will break if dropped. Light-weight for greater ease and safety when mounting to an A-Frame. Use with 3/4" rope only.	



Garlock Air Conditioner Jacks

Part Number	GAR-300228
<ul style="list-style-type: none"> •Slide under a/c unit and raise 18" •The interlocking system has a range up to 6 ft. without extensions and up to 10 ft. with extensions •The large 4 3/4" x 8 1/4" base on the jacks provide stability and protect the roof •Four jacks with two extension bars are standard 	

Hoisting



Garlock Atlas 2000lb Hydraulic Hoist

Part Number	GAR-300960
<p>The Atlas MegaLift Hoist sets a higher standard of power, speed and smooth lifting performance to get your loads up and down in record time. Rated at 2000 lb. capacity, the Atlas hoist is loaded with features that make this the undisputed leader in the industry.</p> <ul style="list-style-type: none"> •Self-contained Power Unit •Swings Right or left •18-hp Honda Engine •160 fpm and 2000 lb. Capacity •225' 5/16' Cable Standard 	



Garlock 300lb Hand Hoist

Part Number	GAR-400060
<p>The boom reach is adjustable and overall weight is just 76 lbs. Counter balance pans and hoisting wheel are optional. Ideal for lightweight hoisting of equipment and materials quickly Adjustable boom reach Optional counter balance pans and hoisting wheel available.</p>	



Garlock Trash Tray

Part Number	GAR-400794
<ul style="list-style-type: none"> •Perfect for off-loading debris •14½-cu.-ft./800-lb. capacity 	



Garlock 400lb Swing Hoist

Part Number	GAR-300022
<p>Counterweight system (priced separately) includes a tray and five cans weighting 80 lbs. each when filled with concrete. Left-or-right-swinging boom with locking center position Outriggers for load stabilization Optional counterweight system includes a tray and five cans.</p>	



Garlock Counterweight Set

Part Number	GAR-402290
<p>Counterweights for Garlock 300lb or 400lb hand hoist</p>	

Motors



HONDA
ENGINES

Honda 2.5hp

Part Number	HNDGXH50QXA
Engine Type	Air-cooled, 4-Stroke, OHV, single cylinder
Bore x Stroke	1.65" x 1.42" (41.8 x 36 mm)
Displacement	2.99 cu in (49 cm ³)
Compression Ratio	8.0 : 1
Net Power (kW/rpm)*	2.1 hp (1.6kW) at 7,000 rpm
Net Torque*	2.0 lbs ft (2.7 Nm) at 4,500 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Transistorized Magneto
Starting System	Recoil Starter
Carburetor	Float Type
Lubrication System	Forced Splash
Governor System	Centrifugal Mechanical
Air Cleaner	Semi-dry type
Oil Capacity	0.26 US qt (0.25l)
Fuel Tank Capacity (liter)	0.81 US qt (0.77l)
Dimensions (L x W x H)	8.9" (225mm) x 10.8" (274mm) x 13.0" (353mm)
Dry Weight	12.1 lbs (5.5 kg)



HONDA
ENGINES

Honda 3.0hp

Part Number	HNDGX100QA2
Engine Type	Air-cooled, 4-Stroke, OHC, single cylinder
Bore x Stroke	2.2" x 1.6" (56 x 40 mm)
Displacement	6.0 cu in (98 cm ³)
Compression Ratio	8.5 : 1
Net Power (kW/rpm)*	2.8hp (2.1kW) at 3,600 rpm
Net Torque*	4.2 lbs ft (5.7 Nm) at 3,600 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Transistorized Magneto
Starting System	Recoil Starter
Carburetor	Horizontal type butterfly valve
Lubrication System	Forced Splash
Governor System	Centrifugal Mechanical
Air Cleaner	Dual Element Type
Oil Capacity	0.42 US qt (0.40l)
Fuel Tank Capacity (liter)	0.81 US qt (0.77l)
Dimensions (L x W x H)	11.6" (295mm) x 12.0" (304mm) x 15.8" (402mm)
Dry Weight	23.4 lbs (10.6 kg)



HONDA
ENGINES

Honda 4.0hp

Part Number	HNDGX120TQX2
Engine Type	Air-cooled, 4-Stroke, OHV, single cylinder
Bore x Stroke	2.4" x 1.7" (60 x 42 mm)
Displacement	7.2 cu in (118 cm ³)
Compression Ratio	8.5 : 1
Net Power (kW/rpm)*	3.5 hp (2.6 kW) at 3,600 rpm
Net Torque*	5.4 lbs ft (7.3 Nm) at 2,500 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Transistor Magneto
Starting System	Recoil Starter
Carburetor	Butterfly
Lubrication System	Splash
Governor System	Mechanical
Air Cleaner	Dual Element
Oil Capacity	0.59 US qt (0.56 L)
Fuel Tank Capacity (liter)	2.1 US qt (2.0 L)
Evaporative Emissions	Low permeation hose and purge joint provided
Exhaust Emissions	Certified for use in all 50 states
Dimensions (L x W x H) Q-Shaft	11.7" (297 mm) x 13.6" (346 mm) x 13.0" (329 mm)
Dry Weight	29 lbs (13.0 kg)



HONDA
ENGINES

Honda 5.5hp

Part Number	HNDGX160TQX2
Engine Type	Air-cooled, 4-Stroke, OHV, single cylinder
Bore x Stroke	2.7" x 1.8" (68 x 45 mm)
Displacement	9.9 cu in (163 cm ³)
Compression Ratio	9.0 : 1
Net Power (kW/rpm)*	4.8 hp (3.6 kW) at 3,600 rpm
Net Torque*	7.6 lbs ft (10.3 Nm) at 2,500 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Transistor Magneto
Starting System	Recoil & Electric Starter
Carburetor	Butterfly
Lubrication System	Splash
Governor System	Mechanical
Air Cleaner	Dual Element
Oil Capacity	0.61 US qt (0.58 L)
Fuel Tank Capacity (liter)	3.3 US qt (3.1 L)
Evaporative Emissions	Low permeation hose and purge joint provided
Exhaust Emissions	Certified for use in all 50 states
Dimensions (L x W x H) Q-Shaft	12.2" (312 mm) x 14.3" (362 mm) x 13.6" (346 mm)
Dry Weight	33 lbs (15.1 kg)



HONDA
ENGINES

Honda 6.5hp

Part Number	HNDGX200TQX2
Engine Type	Air-cooled, 4-Stroke, OHV, single cylinder
Bore x Stroke	2.7" x 2.1" (68 x 54 mm)
Displacement	12 cu in (196 cm ³)
Compression Ratio	8.5 : 1
Net Power (kW/rpm)*	5.5 hp (4.1 kW) at 3,600 rpm
Net Torque*	9.1 lbs ft (12.4 Nm) at 2,500 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Transistor Magneto
Starting System	Recoil & Electric Starter
Carburetor	Butterfly
Lubrication System	Splash
Governor System	Mechanical
Air Cleaner	Dual Element
Oil Capacity	0.63 US qt (0.60 L)
Fuel Tank Capacity (liter)	3.3 US qt (3.1 L)
Evaporative Emissions	Low permeation hose and purge joint provided
Exhaust Emissions	Certified for use in all 50 states
Dimensions (L x W x H) Q-Shaft	12.6" (321 mm) x 14.8" (376 mm) x 13.6" (346 mm)
Dry Weight	35 lbs (16.1 kg)



HONDA
ENGINES

Honda 8.0hp

Part Number	HNDGX240QA2
Engine Type	Air-cooled, 4-Stroke, OHV, single cylinder
Bore x Stroke	3.0" x 2.3" (77 x 58 mm)
Displacement	16 cu in (270 cm ³)
Compression Ratio	8.5 : 1
Net Power (kW/rpm)*	7.9 hp (5.9 kW) at 3,600 rpm
Net Torque*	13.5 lbs ft (18.3 Nm) at 2,500 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Recoil & Electric Starter
Carburetor	Butterfly
Lubrication System	Splash
Governor System	Centrifugal Mass Type
Air Cleaner	Dual Element
Oil Capacity	1.16 US qt (1.1 L)
Fuel Tank Capacity (liter)	6.4 US qt (6.1 L)
Evaporative Emissions	Low permeation hose and purge joint provided
Exhaust Emissions	Certified for use in all 50 states
Dimensions (L x W x H) Q-Shaft	15.0" (380 mm) x 16.9" (429 mm) x 16.6" (422 mm)
Dry Weight	55 lbs (25.0 kg)

Motors



HONDA
ENGINES

Honda 9.0hp

Part Number	HNDGX270QA2
Engine Type	Air-cooled, 4-Stroke, OHV, single cylinder
Bore x Stroke	3.0" x 2.3" (77 x 58 mm)
Displacement	16 cu in (270 cm3)
Compression Ratio	8.5 : 1
Net Power (kW/rpm)*	8.5 hp (6.3 kW) at 3,600 rpm
Net Torque*	14.1 lbs ft (19.1 Nm) at 2,500 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Recoil & Electric Starter
Carburetor	Butterfly
Lubrication System	Splash
Governor System	Centrifugal Mass Type
Air Cleaner	Dual Element
Oil Capacity	1.16 US qt (1.1 L)
Fuel Tank Capacity (liter)	6.4 US qt (6.1 L)
Evaporative Emissions	Low permeation hose and purge joint provided
Exhaust Emissions	Certified for use in all 50 states
Dimensions (L x W x H) Q-Shaft	15.0" (380 mm) x 16.9" (429 mm) x 16.6" (422 mm)
Dry Weight	55 lbs (25.0 kg)



HONDA
ENGINES

Honda 11.0hp

Part Number	HNDGX340QA2
Engine Type	Air-cooled, 4-Stroke, OHV, single cylinder
Bore x Stroke	3.5" x 2.5" (88 x 64 mm)
Displacement	24 cu in (389 cm3)
Compression Ratio	8.2 : 1
Net Power (kW/rpm)*	10.7 hp (8.0 kW) at 3,600 rpm
Net Torque*	19.5 lbs ft (26.4 Nm) at 2,500 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Recoil & Electric Starter
Carburetor	Butterfly
Lubrication System	Splash
Governor System	Centrifugal Mass Type
Air Cleaner	Dual Element
Oil Capacity	1.16 US qt (1.1 L)
Fuel Tank Capacity (liter)	6.4 US qt (6.1 L)
Evaporative Emissions	Low permeation hose and purge joint provided
Exhaust Emissions	Certified for use in all 50 states
Dimensions (L x W x H) Q-Shaft	16.0" (407 mm) x 19.1" (485 mm) x 17.7" (449 mm)
Dry Weight	69 lbs (31.5 kg)



HONDA
ENGINES

Honda 13.0hp

Part Number	HNDGX390QA2
Engine Type	Air-cooled, 4-Stroke, OHV, single cylinder
Bore x Stroke	3.5" x 2.5" (88 x 64 mm)
Displacement	24 cu in (389 cm3)
Compression Ratio	8.2 : 1
Net Power (kW/rpm)*	11.7 hp (8.7 kW) at 3,600 rpm
Net Torque*	19.5 lbs ft (26.4 Nm) at 2,500 rpm
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Recoil & Electric Starter
Carburetor	Butterfly
Lubrication System	Splash
Governor System	Centrifugal Mass Type
Air Cleaner	Dual Element
Oil Capacity	1.16 US qt (1.1 L)
Fuel Tank Capacity (liter)	6.4 US qt (6.1 L)
Evaporative Emissions	Low permeation hose and purge joint provided
Exhaust Emissions	Certified for use in all 50 states
Dimensions (L x W x H) Q-Shaft	16.0" (407 mm) x 19.1" (485 mm) x 17.7" (449 mm)
Dry Weight	69 lbs (31.5 kg)



HONDA
ENGINES

Honda 20.0hp

Part Number	HNDGX630QZB3
Engine Type	Air-cooled, 4-Stroke, OHV Horizontal
Bore x Stroke	3.1" x 2.8" (78 x 72 mm)
Displacement	42 cu in (688 cm3)
Compression Ratio	9.3 : 1
Net Power*	20.8 hp (15.5 kW)
Net Torque*	35.6 lbs ft (48.3 Nm)
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Shift Type
Carburetor	2-barrel, fuel cut solenoid, inner vent
Lubrication System	Full Pressure
Connecting Rod	Forged Steel
Governor System	Mechanical
Air Cleaner	Dual Element Type/Cylindrical
Exhaust Emissions	Certified for use in all 50 states
Evaporative Emissions	Low permeation hose and purge joint provided
Oil Capacity	2.1 US qt (2.0 L)
Oil Filter	Automotive Spin-On Style
Dimensions (L x W x H)	15.9" (405 mm) x 16.1" (410 mm) x 17.2" (438 mm)
Dry Weight	98 lbs (44.4 kg)



HONDA
ENGINES

Honda 24.0hp

Part Number	HNDGX690BAF
Engine Type	Air-cooled, 4-Stroke, OHV Horizontal
Bore x Stroke	3.1" x 2.8" (78 x 72 mm)
Displacement	42 cu in (688 cm3)
Compression Ratio	9.3 : 1
Net Power*	22.1 hp (16.5 kW)
Net Torque*	35.6 lbs ft (48.3 Nm)
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Shift Type
Carburetor	2-barrel, fuel cut solenoid, inner vent
Lubrication System	Full Pressure
Connecting Rod	Forged Steel
Governor System	Mechanical
Air Cleaner	Dual Element Type/Cylindrical
Exhaust Emissions	Certified for use in all 50 states
Evaporative Emissions	Low permeation hose and purge joint provided
Oil Capacity	2.1 US qt (2.0 L)
Oil Filter	Automotive Spin-On Style
Dimensions (L x W x H)	15.9" (405 mm) x 16.1" (410 mm) x 17.2" (438 mm)
Dry Weight	98 lbs (44.4 kg)

Safety



50' Fallmaster Fall Arrest System

Part Number	RMP-412315
<p>50' FallMaster BASIC Fall Arrest System Contains: *</p> <ul style="list-style-type: none"> Universal harness HUV with 5 points of adjustment for added comfort * 50' Vertical Lifeline Assembly with Shock Pack, and * Permanently attached Positioning Device with 18" lanyard extension to keep device within reach * Two double locking snap hooks * Snappy Disposable Anchor with nails. This Kit meets or exceeds O.S.H.A Regulation 29CFR1926 and A.N.S.I. Z359-2009, requiring Personal Fall Arrest Systems. 	



Folding Warning Line System

Part Number	RSE-RZ65002
<p>Help protect workers from dangerous areas around jobsite or roof. Includes 4 Stanchions and 105' of bright yellow pennants. This lightweight and compact warning line system is easier to set up and requires less storage space. Spring activated legs lock firmly into place, no lost poles or locking pins. Each stanchion has a built in handle for easier transporting to and from jobsite.</p>	



Warning Flags

Part Number	RSE-WARNINGFLAG-RED
	RES-WARNINGFLAG-YELW
<p>Features</p> <ul style="list-style-type: none"> •105 ft. •Increases visibility of hazardous areas •18" Red/yellow triangle flags •500 lb. required break strength •10 pcs per box 	



EZ-Stor Warning Flag System

Part Number	RSE-RZ65016
<ul style="list-style-type: none"> •Constructed with heavy duty Loc-On-Galv steel tubing w/clear coat •Will not rust from inside out •Interlocking legs pin to the vertical stanchion tube for quick set up and tear down <p>Includes</p> <ul style="list-style-type: none"> •4 stanchions •100 ft. of warning flags 	



Perimeter Defender


Part Number	RSE-PERIMETERDEFEND
<p>Features</p> <ul style="list-style-type: none"> •Easy flag tie-off system •Quick set-up and removal •Safety orange, UV resistant •Stackable with or without base •39" OSHA compliant tie off height 1926.502(f)(2)(ii) •High impact polyethylene •Skid resistant •Rubber base will not damage surfaces 	



Parapet Wall and Universal Guardrail System

Part Number	RSE-RZ65015
<p>Adjustable and easy to use guardrail system for parapet walls and floor slabs. Unique tubular design allows for easier placement and installation. Adjustable rail brackets for easy and fast attachment of 2x4's. By inverting the compression base, you can use as a universal guardrail system for exposed floors, walkways, decks, or wherever you need a fall protection system. Maximum spacing of 8', complies with OSHA standards. Comes with toe board bracket installed. 2 per master carton.</p>	

Safety

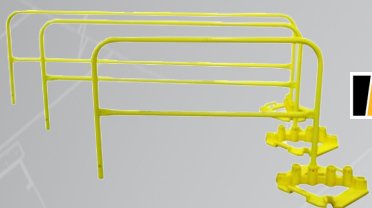

Garlock Railguard 200

Part Number	10' Railguard	GAR-400984
	7' 6" Railguard	GAR-400985
	5' Railguard	GAR-400986

RailGuard is modular and comes in basic kits which include (1) rail, (1) base and (1) pin. Individual components can be added for custom safety guardrail applications. RailGuard can also be mounted permanently both internally and externally.

- 16 gauge welded steel rail and powder coated for durability
- Std. yellow color or available in a wide variety of colors
- 90 pound four socket cast bases for flexibility and ease of installation
- Meets OSHA 1910.23(c)



Garlock Perimeter Clamp

Part Number	GAR-155160
-------------	------------

Perimeter systems save labor and improve efficiency over visual warning lines because after setup, you can safely work all the way to the edge of the roof or deck structure without being tied off.

- Clamp and Stanchion system for leading edge fall prevention. (2x4 wood not provided)
- Secures to parapet, flat edge, or slab edge enabling free access to entire protected area.
- Meets OSHA 1926.501(b)(1)
- No-Tool installation of clamp and stanchions.
- Ergonomic Large coated handle for ease of use and long life.
- Concealed fastener threads protect from handling damage.
- Adjustable clamp can accommodate up to a 24" parapet.
- Concealed fastener threads protect from handling damage.



Garlock Baseplate for Railguard 200

Part Number	GAR-155160
Additional baseplate for the Garlock Railguard 200	



Garlock Base Transporter

Part Number	GAR-300892
Additional baseplate for the Garlock Railguard 200	



Garlock Folding Warning Lines

Part Number	GAR-300229
-------------	------------

Create a safe-zone using the Garlock Folding Warning Line System. Heavy duty folding stanchions and 100 ft of vinyl flags set up quickly. Add the optional transporter for the ultimate in storage and portability. Typical installation for warning lines requires lines be placed a minimum of 6ft. from hazard for construction applications. (See your individual state OSHA regulations for compliance.)

- Premium folding warning line system used for visual warning of at risk areas.
- Meets OSHA 1926.502(f)(2)
- Standard system includes three folding bases and 100 feet of flags.

Safety Fall Carts



Roof Zone Penetrator

Part Number	Penetrator	EQP-RZ65033
	Aluminum Work Surface	EQP-RZ65031
	Lifting Kit	EQP-RZ65032

The Penetrator is the industry's first lightweight and fully portable mobile fall protection device. When a fall occurs, the powerful penetrating spikes engage, piercing into the roof insulation and metal decking, thus creating a safe, secure anchor. For use on most substrates, **NOT INCLUDING CONCRETE**, the Penetrator has been tested for use on Built-Up, TPO, ISO, PVC, EPDM and other standard materials that are part of a finished roof system. The Penetrator is reusable and offers the lightest mobile fall protection system available on the market today



Garlock Lifepoint Duo

Part Number	w/Steel Weights	GAR-301383
	w/Empty Cans	GAR-301384

The LifePoint Duo is the perfect solution for a 2 person fall protection when circumstances require non-penetrating versatility. LifePoint provides the answer with an easy to set up and quick-move solution.

- Non-Penetrating to preserve rooftop water integrity.
- Tie-off points for (1) Fall-arrest and (1) Fall-Restraint
- Easy to reposition
- Ratcheted handle enables the weighted body of the unit to lifted safely
- Fits in most service elevators
- Available with either open concrete can weights or cast weights

Scoops

Valley



#10 D-Handle Steel Scoop

Part Number	MISSHVL-SCOOP10S30DW
<ul style="list-style-type: none"> •#10 Steel scoop blade •30" D-Handle •Versatile multi purpose scoop shovel •USA ash hardwood handle •Assembled in USA 	

Valley



#10 Straight Handle Steel Scoop

Part Number	MISSHVL-SCOOP10S48SW
<ul style="list-style-type: none"> •#10 Steel scoop blade •48" Straight Handle •Versatile multi purpose scoop shovel •USA ash hardwood handle •Assembled in USA 	

Valley



#12 D-Handle Poly Scoop

Part Number	MISSHVL-SCOOP12P30DW
<ul style="list-style-type: none"> •14³/₄" x 18³/₄" blade is equivalent to a #12 scoop but will hold up to 15% more than a normal scoop head •Heavy duty polypropylene material is designed for rough work •Lighter polypropylene head reduces stress to the user 	

Valley



#10 D-Handle Aluminum Scoop

Part Number	MISSHVL-SCOOP10A30DW
<ul style="list-style-type: none"> •#10 Aluminum scoop blade •30" D-Handle •Non-sparking, lightweight, and non-corrosive •Versatile multi purpose scoop shovel •USA ash hardwood handle •Assembled in USA 	

Valley



#10 Straight Handle Aluminum Scoop

Part Number	MISSHVL-SCOOP10A48SW
<ul style="list-style-type: none"> •#10 Aluminum scoop blade •48" Straight Handle •Non-sparking, lightweight, and non-corrosive •Versatile multi purpose scoop shovel •USA ash hardwood handle •Assembled in USA 	

Sweepers/Clean-Up



Grizzly Power Broom

Part Number	GRZ-370000
The 36" sweeper comes complete with a GX270 Honda engine . It can be easily manoeuvred and controlled. There are three sweeping positions with the steel and nylon brush producing a clean surface.	

Tearoff Equip./Tools



Spud Bar

Replacement Blade

Part Number	MISSHVL-SPUDBAR7
Part Number	MISSHVL-SPUDBLADE7
<ul style="list-style-type: none"> •Heavy duty steel tube design •Knob handle •Replaceable hardened steel blade For removal of <ul style="list-style-type: none"> •Old roofing •Slag & gravel •Eliminating fasteners •Ect. 	



Shingle Remover

Part Number	MISSHVL-SHNGLRIP54
For removal of <ul style="list-style-type: none"> •Asphalt shingles •Cedar shakes •Underlayments •Etc. •Vinyl grip handle for added comfort •Heat tempered teeth 	



Serrated Roofers Spade

Part Number	MISSHVL-TEAROFFSERST
Serrated spade w/ wide heel & steel handle Serrated spade w/ wide heel & solid core fiberglass handle <ul style="list-style-type: none"> •7" x 11" spade •6" x 9" extra wide heel •61" overall 	



Flat Roofers Spade

Part Number	MISSHVL-TEAROFFFLTST
Spade w/ wide heel & steel handle Spade w/ wide heel & solid core fiberglass handle <ul style="list-style-type: none"> •7" x 11" spade •6" x 9" extra wide heel •61" overall 	

Tearoff Equip./Tools



Razer Tearoff Machine

Part Number	RMP-475500
-------------	------------

The Razer Tear-Off Machine features:

- Latest Hydrostatic Trans-axle
- No Hydraulic Hoses or Tank
- Easy Access for Field Maintenance
- Heavy Duty Frame
- Industrial Precision Bearings and
- Camshaft with 4 Port Grease Block
- Adjustable Blade Made of Hardened Special Alloy Steel
- 13HP Honda Electric Start Engine
- Low Center of Gravity at 580 lbs



9 hp Honda Single Saw

Part Number	RMP-490520
-------------	------------

The power saws are made of the highest quality steel components in the industry. All engines are state-of-the-art technology conforming to all Federal & State regulations while producing the highest optimum performance possible. A very important feature is the Uni-tracking ability that allows the saw to cut in a true straight-line and prevents drifting while cutting (other saws tend to drift off-line). Features: 9hp Honda Engine Ergonomically balanced for LESS fatigue Remote Breather helps engine stay cleaner & run cooler 12" Carbide Tipped Blades Cutting depth: 0" to 3.5" (with 14" blades)



13 hp Single Roof Saw

Part Number	RMP-490553
-------------	------------

The power saws are made of the highest quality steel components in the industry. All engines are state-of-the-art technology conforming to all Federal & State regulations while producing the highest optimum performance possible. A very important feature is the Uni-tracking ability that allows the saw to cut in a true straight-line and prevents drifting while cutting (other saws tend to drift off-line). Features: 13hp Honda Engine Ergonomically balanced for LESS fatigue Remote Breather helps engine stay cleaner & run cooler 12" Carbide Tipped Blades Cutting depth: 0" to 3.5" (with 14" blades)



Mini-Razer Tear Off Bar

Part Number	RMP-491910
-------------	------------

Easy to handle, the Mini-Razer will save on labor! Just ram it under old built-up roofing and press down to loosen old roof and insulation. Features steel wheels and hardened steel blade. This model has a straight blade.



11 hp Surface Planer

Part Number	RMP-490200
-------------	------------

All Rotary Action Planing Machines feature single lever adjustable cutting height, inset rear wheel for close-up work, pulley enclosed in safety shroud and 8x2.50 semi-pneumatic tires. 12" solid steel flywheel with four carbide-tipped scratcher teeth will spud a 12" path to within 1" of walls, up to 10 squares per hour. 11 hp Honda syncro-balanced engine with belt and pulley.

Tearoff Equip./Tools




Grizzly Tearoff Machine

Part Number	GRZ-320000
<p>GRIZZLY'S hydraulic roof remover is loaded with innovations. This machine is fully hydraulic, no differentials or transfer cases. Two hydraulic motors drive the wheels and the blade is driven from a third hydraulic motor. It's have a GX340 Honda engine.</p> <p>This technology provides GRIZZLY with the advantage of controlling each of the wheels individually to allow forward, reverse and even turning, an industry first!</p>	



Grizzly Mini Roof Cutter

Part Number	GRZ-304000
<p>This GRIZZLY mini cutter has a GX200 Honda engine, it's perfect for tight spots. The handle is adjustable and can fold down to allow cutting under structures that have 18" clearance. The floating blade guard can be raised for inspecting and changing the blade. The mini cutter is very light, making it ideal for small crews, repair crews and small areas. This cutter can be lifted to the roof using a ladder hoist as long as it is held securely of course.</p>	



Grizzly Tearoff Hand Tool

Part Number	GRZ-801500
<p>The GRIZZLY tear off ripper features semi-pneumatic wheels. It is longer and wider than the 801000 which offers more room and comfort for taller users. Its back is convex for added leverage when ripping.</p>	



Grizzly Roof Planer

Part Number	GRZ-350000
<p>For large or small jobs, can get you to within an inch of walls or curbs. The GRIZZLY Planer runs smoothly minimizing operator fatigue, producing a table top smooth finish. With the new height adjustment handle, height adjustment is as easy as turning a crank. This Planer features a GXV340 Honda engine and four carbide pins that are very solid and durable. A single lift ring allows safe and easy hoisting to the roof.</p>	

Tearoff Equip./Tools



GARLOCK
EQUIPMENT COMPANY
HONDA
ENGINES

Garlock Ultra Cutter

Part Number

GAR-301295

The streamlined design, easy component accessibility, and high-quality components of the Garlock Ultra Cutter will increase your overall production and reduce the maintenance problems associated with conventional roof cutters. Easy to operate and maneuver, the Ultra Cutter delivers unmatched cutting performance.

- 13-hp, Honda engine for maximum horsepower and smoother, cooler running operation
- The triple-wide v-belt with quick-change feature makes on-deck maintenance a reality
- The belt pulley is secured with an exclusive Taper-lok bushing— the strongest lockin system available
- Cleaner air intake
- Improved depth-setting control



GARLOCK
EQUIPMENT COMPANY
HONDA
ENGINES

Garlock Roof Warrior

Part Number

GAR-301197

For over a decade, contractors have turned to the #1 selling tearoff machine in the U.S. the Roof Warrior. The definitive name in tearoff machines, the Roof Warrior utilizes Garlock's best engineering and manufacturing advancements, resulting in a tearoff machine that achieves a level of quality, versatility, and performance unmatched in the industry.

- Hydrostatic transaxle for forward and reverse maneuverability
- Adjustable pitch blade stays down in the material—mechanically fastened, foam, lightweight concrete, and even solid mop downs
- Actuating blade slices through fasteners and trouble spots on wood, metal, or concrete decks
- Split rim wheels allow you to change tires and reuse the rims
- 11-hp Honda electric-start engine



GARLOCK
EQUIPMENT COMPANY
HONDA
ENGINES

Garlock Mini-Saw

Part Number

GAR-300035

- Low 18" clearance, lightweight, and easy to maneuver
- 5.5-hp Honda engine
- Quick-change belt
- Floating glade guard
- 2" wall clearance is perfect for cutting under vents, around air conditioners, and small patch work



GARLOCK
EQUIPMENT COMPANY

Garlock Super Tearoff Bar

Part Number

GAR-400009

- All-steel heavy-duty frame 6" steel wheels Hardened steel blade
- Optional tined Shingle Tearoff Blade is available (for removing shingles)

Tires



400x8 Assy 6"Hub

Part Number	RMP-515410
-------------	------------

The Standard Pneumatic 4.00 x 8 wheel used in the Roofing Industry. This wheel comes with a 6" hub and 1" roller bearings for a low resistance installation.



NFL 4.00x8 Assy 6"Hub

Part Number	RMP-515665
-------------	------------

4.00x8 with 6" Centered Hub and 1" Roller Bearings filled with Non-Flat Lite (NFL) foam. Remember, the NFL tire does not have a "memory" or flat spot after sitting overnight.



Replacement Chevron Tire ONLY

Part Number	RMP-471221
-------------	------------

16 x 5 Chevron Tire. Replacement tire for some tractors and Roof Removers. Used on Gravely, Garlock, Panther and Reeves.



18x850 6"HL Wheel Complete

Part Number	RMP-505053
-------------	------------

Replacement 18 x 8.50 wheel assemblies with a 6" roller bearing hub. Used on 4 wheel trailers and any other type of cart where you need the load spread out over a wide footprint. These are tubeless pneumatic tires.



NFL 18x850 Complete

Part Number	RMP-505050M
-------------	-------------

18x8.50-8 Wheel with 6" Offset Hub and 1" Roller Bearings filled with Non-Flat Lite (NFL) foam. Replace your pneumatic wheels for a flat free jobsite. Will fit any piece of equipment with a 1" axle and a 6" space between the cotter pin and washer stop. Remember, the NFL tire does not have a "memory" or flat spot after sitting overnight.

Wheelbarrows



Grizzly Wheelbarrow

Part Number	GRZ-202000
-------------	------------

We have increased the length of the protective nose piece to keep the wheelbarrow from rolling back when dumping. Very well balanced, it will save your back!! It is provided with a lifting ring.



Heavy Duty Wheelbarrow

Part Number	EQP-RZ65011
-------------	-------------

Wheelbarrow features heavy duty welded tube frame for greater strength and longer life, extended handles for reduced user fatigue, and tubular front plate preventing tray damage. The dual wheel design provides improved balance, preventing job site materials from falling out due to tip over. Capacity is 6 cubic feet.



www.profastinc.com

Owner

Jim Mullins
jim@profastinc.com

Outside Sales Team

Chris Zoellner
chris.z@profastinc.com
David Leake
dave.l@profastinc.com
Brad Mullins
brad.m@profastinc.com
Jason Fogelman
jason.f@profastinc.com
Anthony Pilotti
anthony.p@profastinc.com

1-800-243-3418

Inside Sales Team

Alex Mullins
alex.m@profastinc.com
James Heck III
james.h@profastinc.com
Ed Striano
ed.s@profastinc.com
Joe Bucholski
joe.b@profastinc.com
Greg Hepfer
greg.h@profastinc.com

Warehouse Managers

Bradley Snyder
bradly.s@profastinc.com
Tyler Beeson
610-521-3404

Marketing

Brett Wolfe
brett.w@profastinc.com

Distributed by your Pro-Fast Rep:



Equipment | Sales | Service
800-243-3418 • profastinc.com

Two Locations to Serve You:

6 Poulson Ave
P.O. Box 156
Essington, PA 19029
Phone: 610-521-3404
Fax: 610-521-4717

7917 Derry St
Suite 106
Harrisburg, PA 17111
Phone: 717-458-5610
Fax: 717-458-5613

sales@profastinc.com