

Bonded Washers



Galvanized/Stainless Steel Washers

Diameter	#8, #10, #12, #14
Material	Carbon Steel, Stainless Steel
Finish	Galvanized, Zinc

Clip Screws



Pancake Head Sharp Point Clip Screw

Diameter	#10, #12
Length	1" up to 2"
Head	Standard Pancake, Ultra Low Profile
Drive	Square, Phillips, Quadrex
Point Type	Type A, Type 17
Finish	Zinc, Coated*, Stainless Steel
Manufacturers	Buildex, Elco, SFS, International Fasteners.



Pancake Head Self Drill Clip Screw

Diameter	#10, #12
Length	1" up to 2"
Head	Standard Pancake
Drive	Square, Phillips, Quadrex
Point Type/ Drill and Tap Capacity	Self Drill #3 #10- .036 to .175 #12- .036 to .210
	Self Drill #5 #12- .075 to .500
Finish	Zinc, Coated*, Stainless Steel
Manufacturers	Buildex, Elco, SFS, International Fasteners

Collated Fasteners

SIMPSON
Strong-Tie




QuickDrive

Manufacturer	Simpson
--------------	---------

QuickDrive auto-feed screw driving systems are easy to use, durable and designed for a wide variety of fastening applications. They feature quick-loading screw strips, precise countersink adjustment and a patented auto-advance mechanism.

Popular Applications

- Subflooring/Sheathing
- Drywall
- Fiber-cement siding
- Exposed-fastener metal roofing/siding
- Steel framing/stitching
- Underlayment/backerboard
- Crafting truss
- Nailers/ledgers on steel
- Decks/docks
- Fiberglass-backed gypsum sheathing
- Standing-seam metal roofing
- Tile roofing
- Steel decking/stitching
- Truck beds/trailer flooring
- Ply fastening



QuickDrive Screw Features

Head Styles: Flat Head, Flat Head w/ ribs, Bugle Head, Trim Head, Trim Head w/ ribs, Cap Head

Thread Styles: Ribbed Flat Head, Ribbed Washer Head, Modified Truss Threads, Pan Head, Pancake Head, Ultra Low Profile Pancake Head, Washer Head, Washer Head

Point Styles: Sharp Point, Type 17 Point, Drill Point, Pilot Point, Drill Point w/ Wings

Shank smooth shank and fully threaded screws are available

Measure Pan, Pancake, Truss, and Hex Head screws from under head to point

Measure all other Quick Drive screws from top of head to point

GRABBER
CONSTRUCTION PRODUCTS
"The Professional's Choice"




SuperDrive

Manufacturer Grabber

The SuperDrive is a lightweight, easy-to-use automated fastening tool designed to work with your favorite driver. It works with DeWalt, Makita and Hitachi screw guns. It can use screws from #6-12 diameter, up to 3" long.

Recommended Applications

- Drywall and sheathing to wood or metal
- Metal to metal construction
- Wood to wood construction
- Light or heavy gauge metal
- Wood to metal
- Subfloor/deck/dock
- Roof tile



Superdrive Fasteners

1 DRYWALL Ply/OSB - Course Thread

Interior Sharp Point

- #6 x 1-1/4" Bugle Head - C300/C3007
- #6 x 1-5/8" Bugle Head - C400/C4007
- #7 x 2" Bugle Head - C500
- #8 x 2-1/2" Bugle Head - C900

Drywall to Drywall

- #10 x 1-1/2" Bugle Head - C12

2 SHEATHING Ply/OSB, Exterior Board - Course Thread

Exterior Sharp Point

- #6 x 1-1/4" Bugle Head - C300RG
- #6 x 1-5/8" Bugle Head - C400RG
- #7 x 2" Bugle Head - C500RG
- #8 x 1-1/4" Bugle Head - C16125

3 SUBFLOOR Wood - Course Thread

Interior Sharp Point

- #6 x 1-3/4" Flat Head - C81751297 LOX3
- #8 x 2" Flat Head - C81001297 LOX3
- #8 x 2-1/2" Flat Head - C82501297 LOX3

4 DECKS - Course Thread

Exterior Sharp Point

- #8 x 2" Flat Head - C820012M LOX2
- #8 x 2-1/2" Flat Head - C825012M LOX2
- #8 x 3" Flat Head - C930012M LOX2

316 Stainless Steel

- #8 x 2-1/2" Flat Head - C82501316 LOX2
- #10 x 2-1/2" Flat Head - C8107501316 LOX2
- #10 x 3" Flat Head - C8103001316 LOX2

5 DRYWALL Ply/OSB - Fine Thread

Interior Sharp Point

- #6 x 1-1/4" Bugle Head - C368
- #6 x 1-5/8" Bugle Head - C468
- #7 x 2" Bugle Head - C768

Interior Drill Point

- #6 x 1-1/4" Bugle Head - C14Z
- #6 x 1-5/8" Bugle Head - C15Z
- #7 x 1-7/8" Bugle Head - C16Z

6 SHEATHING Ply/OSB, Exterior Board - Fine Thread

Exterior Sharp Point 20 - 25 Ga.

- #6 x 1-1/4" Bugle Head - C368RG
- #8 x 1-1/4" Bugle Head - CMG125

Exterior Drill Point 20 - 14 Ga.

- #6 x 1-1/4" Bugle Head - C14RG
- #8 x 1-5/8" Bugle Head - C15G68P, CMG158SD

Drywall Screws



Phillips Bugle Head Drywall Screw

Diameter/Length	#6 x 1" up to 2-1/4" #8 x 1-5/8" up to 3" #10 x 3-1/2" up to 6"
Thread	Course, Fine
Finish	Black Phosphate



Phillips Bugle Head Laminating Drywall Screw

Diameter	#10
Length	1-1/2"
Thread	Course
Finish	Black Phosphate
Application	Drywall to drywall in double layer applications such as firewalls and sound proofing



Phillips Bugle Head Hi-Lo Thread Sharp Point

Diameter/ Length	#6 x 1" up to 1-5/8" #7 x 2" #8 x 2-1/2" up to 3"
Thread	Course Hi-Lo
Finish	Black Phosphate



Phillips Bugle Head Self Drill Drywall Screw	
Diameter/Length	#6 x 1" up to 1-7/8" #8 x 2" up to 3" #10 x 3-1/2" up to 4"
Point Type	Self Drill #2 #6 Max Drilling Capacity .078 #8 Max Drilling Capacity .094 #10 Max Drilling Capacity .179
Material	Carbon Steel, 410 Stainless Steel
Finish	Zinc



Phillips Pan Head Framing Screw	
Diameter/Length	#7 x 7/16"
Point Type	Sharp #2 Self Drill Max Drilling Capacity .078
Finish	Black Phosphate, Zinc



Square Drive Trim Head Drywall Screw Sharp Point	
Diameter/Length	#6 x 1" up to 2-1/4" #8 x 3"
Finish	Black Phosphate



Phillips Wafer Head Cement Board Screw Sharp Point	
Diameter/Length	#8 x 1-1/4" #8 x 1-5/8" #8 x 2-1/4"
Thread	Hi-Low
Head	Wafer with Nibs
Point Type	Spade
Finish	Coated*



Square Drive Trim Head Drywall Screw Self Drill	
Diameter/Length	#6 x 1" up to 2-1/4" #8 x 3"
Point Type	Self Drill #2 #6 Max Drilling Capacity .078 #8 Max Drilling Capacity .094
Material	Carbon Steel, 410 Stainless Steel
Finish	Zinc




Phillips Wafer Head Cement Board Screw Self Drill	
Diameter/Length	#8 x 1-1/4" #8 x 1-5/8" #8 x 2-1/4"
Head	Wafer with Nibs
Point Type	Self Drill #2 Max Drilling Capacity .094
Finish	Coated*

Machine Screws



Machine Screws	
Diameter-Thread	#6-32, #8-32, #10-24, #10-32, #12-24, 1/4"-20, 5/16"-18, 3/8"-16
Length	3/16" up to 6" *dependent on diameter
Head/Drive	Slotted Round Head, Combo Round Head, Phillips Flat Head, Phillips Pan Head, Hex Head, Oval Head
Material	Carbon Steel, 18-8 Stainless Steel
Finish	Zinc



Phillips Flat Head Machine Screw	
Diameter-Thread	1/4"-20
Length	1", 1-1/2", 2", 2-1/2", 3", 4"
Point Style	Type F
Material	Carbon Steel
Finish	Zinc

Rivets



40 Series Pop Rivets						
Size (1/8")	Grip Range	AL AL	STL STL	SS SS	C/B	AL STL
42	.062-.125	●	●	●	●	●
43	.125-.187	●	●	●	●	●
44	.188-.250	●	●	●	●	●
46	.250-.375	●	●	●	●	●
48	.375-.500	●	●	●		●

Select sizes/styles available in:

- Closed end
- Countersunk head
- Bulbex
- Open End
- Dome head
- Large Flange



60 Series Pop Rivets						
Size (3/16")	Grip Range	AL AL	STL STL	SS SS	C/B	AL STL
62	.062-.125	●	●	●		●
64	.126-.250	●	●	●		●
66	.250-.375	●	●	●		●
68	.375-.500	●	●	●		●
610	.500-.625	●	●	●		●

Select sizes/styles available in:


- Closed end
- Countersunk head
- Bulbex
- Open End
- Dome head
- Large Flange



80 Series Pop Rivets						
Size (1/4")	Grip Range	AL AL	STL STL	SS SS	C/B	AL STL
84	.125-.250	●	●	●		●
86	.250-.375	●	●	●		●
88	.375-.500	●	●	●		●

Select sizes/styles available in:

- Closed end
- Countersunk head
- Bulbex
- Open End
- Dome head
- Large Flange



Painted Rivets

We offer a full range of color options for painted rivets. (Select Styles/Sizes)

Rivet Key	
Aluminum Rivet/ Aluminum Mandrel	AL/AL
Steel Rivet/ Steel Mandrel	STL/ STL
Stainless Rivet/ Stainless Mandrel	SS/SS
Copper Rivet/ Brass Mandrel	C/B
Aluminum Rivet/ Steel Mandrel	AI/STL

Self Drilling Fasteners



#8-18 Hex Washer Head Self Drill #2	
Length	1/2" up to 1-1/2"
Head	1/4" across the flats
Drill and Tap Capacity	.036 - .100
Finish	Coated*, 410 Stainless, Zinc
Manufacturers	ITW Buildex, Elco, Imports



#10-16 Hex Washer Head Self Drill #3	
Length	1/2" up to 1-1/2"
Head Options <small>*Limited to #10-16 x 3/4" fasteners</small>	High Hat, HWH with serrations
Drill and Tap Capacity	.036 - .175
Finish	Coated*, 410 Stainless, Zinc
Manufacturers	ITW Buildex, Elco, Imports



#12-14 Hex Washer Head Self Drill #3	
Length	3/4" up to 4"
Head	5/16" across the flats
Drill and Tap Capacity	.036 to .210
Finish	Coated*, 410 Stainless, Zinc
Manufacturers	ITW Buildex, Elco, Imports



#12-24 Hex Washer Head Self Drill #5	
Length	1-1/4", 1-1/2", 2"
Head	5/16" across the flats
Drill and Tap Capacity	.125 to .500
Finish	Coated*, Zinc
Manufacturers	ITW Buildex, Elco, Limited imports



1/4-28 Hex Washer Head Self Drill #5	
Length	3", 4", 5", 6", 8"
Head	3/8" across the flats
Drill and Tap Capacity	.125 to .500
Finish	Coated*, Zinc
Manufacturers	ITW Buildex, Elco, Limited Imports



Self Drilling Fasteners with Bonded Washers	
Diameter	#8, #10, #12, #14
Length	1/2" up to 8"
Head	Hex Head
Drill and Tap Capacity	(refer to fasteners without washers)
Material	Carbon Steel, 410 Stainless
Finish	Coated*, Zinc, 410 Stainless* *Limited to certain sizes
Manufacturers	ITW Buildex, Elco, Imports



1/4-14 x 7/8" Hex Washer Head Self Drilling*	
Head	5/16" across the flats
Material	Carbon Steel, 410 Stainless Steel
Finish	Coated *
Manufacturers	ITW Buildex, Elco
Application	Used to "stitch" two pieces of light gauge metal together
*Also available with a bonded washer	



Garage Door Fasteners	
Diameter/Thread /Length	1/4" - 20 x 1" 5/16" - 18 x 1"
Head	HWH with serrations 7/16" across the flats
Finish	Zinc
Application	Used in the installation of garage doors



Hex Head with Integral Washer Self Drill #3	
Diameter/Thread/Length	#10-16 x 3/4" up to 1-1/2" #12-14 x 3/4" up to 2" 1/4-14 x 3/4" up to 2"
Head Material	Stainless, Zamac Alloy, Coated
Point and Shaft Material	Carbon steel
Maximum Drilling Capacity	#10 - .179 #12 - .220 1/4" - .250
Finish	Coated
Manufacturer	ITW Buildex, Elco, International Fasteners




Phillips Modified Truss Head Sharp Point	
Diameter/Length	#8 x 1/2" up to 2-1/2"
Finish	Zinc




Phillips Modified Truss Head Self Drill #2	
Diameter/Length	#8 x 1/2" up to 3" #10 x 3/4"
Maximum Drilling Capacity	#8 - .094 #10 - .179
Finish	Zinc

ITW BUILDEX TEKS SELECT

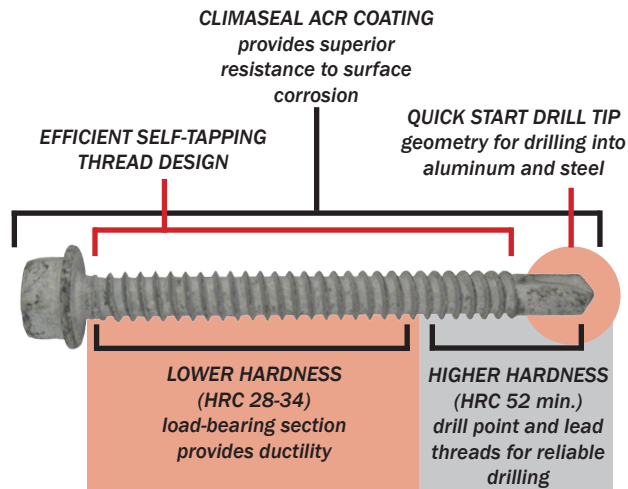

Tek Select Self Drilling Fastener	
Description	Self drilling and tapping, selectively hardened fastener with strength and ductility performance similar to a Grade 5 (1/4-20 diameter) SAE J 429 and ASTM A 449 fastener
Application	Metal attachments, including aluminum and steel
Diameter/Thread/Length	#10-16 x 3/4" #12-14 x 7/8" up to 2" 1/4-14 x 1" and 1-1/2" 1/4-20 x 1-1/8" up to 2-1/2"
Head	Hex Washer Head, Undercut Phillips Flat Head* *available only in 12-14 x 1"
Point Type	Self Drill #3 #10 max drill capacity .150 #12 max drill capacity .187 1/4" max drill capacity .210 Self Drill #4 drill capacity .210 to .312
Finish	Climaseal ACR corrosion-resistant finish meets a minimum of 1,000 hours salt spray per ASTM B117 standards with 0% red rust

ELCO DRIL-FLEX

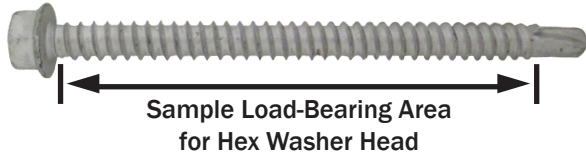

Diameter-Thread x Length	Point	Load-Bearing Area
#10 Diameter, 5/16" Hex Washer Head		
10-16 x 3/4"	#3	.500"
10-16 x 1-1/2"	#3	1.50"
10-16 x 2"	#3	2.00"
10-16 x 2-1/2"	#3	2.50"
#10 Diameter, #2 Phillips Pan Head		
10-16 x 3/4"	#2	.500"
#10 Diameter, #2 Phillips Wafer Head		
10-24 x 1-1/4"	#3	.750"
#12 Diameter, 5/16" Hex Washer Head		
12-14 x 7/8"	#3	.470"
12-14 x 1"	#3	.500"
12-14 x 1-1/2"	#3	1.00"
12-24 x 1-3/4"	#5	.800"
12-14 x 2"	#3	1.50"
12-14 x 3"	#3	2.50"
#12 Diameter, #3 Phillips Undercut Flat Head		
12-14 x 1"	#3	.500"
12-14 x 1-1/2"	#3	1.00"
1/4" Diameter, 3/8" Hex Washer Head		
1/4-14 x 1"	#3	.450"
1/4-14 x 1-1/2"	#3	.950"
1/4-20 x 1-1/2"	#4	.830"
1/4-14 x 2"	#3	1.45"
1/4-20 x 2"	#4	1.33"
1/4-20 x 1-1/8"	#4	.500"
1/4-20 x 1-3/4"	#5	.800"
1/4-20 x 2-1/2"	#4	1.830"
1/4-20 x 3-3/8"	#4	2.70"
1/4-20 x 4"	#4	3.50"

1/4" Diameter, #3 Phillips Undercut Flat Head		
1/4-20 x 3"	#4	2.50"
1/4-20 x 4"	#4	3.50"
5/16" Diameter, 3/8" Hex Washer Head		
5/16-18 x 1-1/2"	#3	.850"
5/16-24 x 1-1/2"	#4	.850"
5/16-24 x 2"	#4	1.35"



Phillips Flat Head Self Drilling Fastener	
Diameter/Length	#8 x 3/4" up to 2" #10 x 3/4" up to 2" #12 x 3/4" up to 2" #14 x 1"
Point Type	Self Drill #2 #8 max drill capacity .094 Self Drill #3 #10 max drill capacity .179 #12 max drill capacity .220 #14 max drill capacity .250
Material	Carbon Steel, 410 Stainless* *available in limited sizes
Finish	Zinc, 410 Stainless* *available in limited sizes
Also available with undercut head #8, #10, #12,	



Phillips Oval Head Self Drill #2	
Diameter/Length	#6 x 1" #8 x 3/4" up to 1-1/2"
Maximum Drilling Capacity	#6 - .078 #8 - .094
Material	Carbon Steel, 410 Stainless* *available in limited sizes
Finish	Zinc



Phillips Pan Head Self Drilling Fastener	
Diameter/Length	#6 x 3/8" up to 1" #8 x 3/8" up to 2-1/2" #10 x 1/2" up to 3" #12 x 3/4" #14 x 3/4"
Drive Option	#2 Square* *Limited diameters and lengths
Point Type	Self Drill #2
	#6 max drill .078 #8 max drill .094
	Self Drill #3
	#10 max drill .179 #12 max drill .220 #14 max drill .250
Material	Carbon Steel, 410 Stainless* *available in limited sizes
Finish	Zinc, 410 Stainless Steel



Phillips Flat Head Wood-to-Metal Self Drill with Wings	
Diameter/Thread/Length	10-24 x 1-7/16" 12-24 x 1-5/8" 12-24 x 2-1/4" 12-24 x 2-3/4" 1/4-20 x 3"
Point Type	10-24 x 1-7/16" Self Drill #3
	Drill and tap capacity: .060 to .175
	Self Drill #4
	Drill and tap capacity: .125 to .250
Finish	Zinc, Coated
Manufacturer	ITW Buildex, Elco, International Fasteners



Phillips Flat Head Pilot Point Wood-to-Metal Self Drill #3	
Diameter/Thread/Length	10-16 x 1-13/16"
Head	Flat Head with Nibs
Drill and Tap Capacity	.030 to .175
Finish	Coated
Manufacturer	ITW Buildex

Wood to Metal Self Drilling Fasteners



Phillips Wafer Head Wood-to-Metal Self Drill #3	
Diameter/Thread/Length	10-16 x 1" 10-24 x 3/4" up to 1-1/2"
Drill and Tap Capacity	#10-16
	.030 to .175
	#10-24
	.036 to .175
Finish	Zinc, Coated
Manufacturer	ITW Buildex, Elco, International Fasteners




Phillips Flat Head Wood-to-Metal Self Drill #3	
Diameter/Thread/Length	10-24 x 1-1/4" 10-24 x 1-1/2"
Drill and Tap Capacity	.036 to .175
Finish	Zinc, Coated
Manufacturer	ITW Buildex, Elco, International Fasteners



Painted Fasteners
We offer a full range of color options for painted fasteners


Sheet Metal Screws

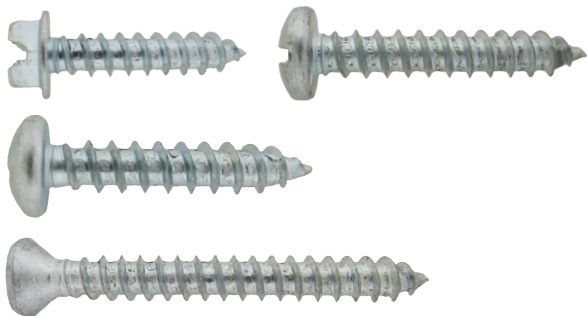

Sheet Metal Screws	
Diameter	#4, #6, #7, #8, #10, #12, #14
Length	3/16" up to 4"
Head	Flat, Hex Head, Oval, Pan, Round, Undercut
Point Type	Type A, Type AB, Type B
Material	Carbon Steel, Stainless Steel
Finish	Zinc



Self Piercing Point Screw	
Diameter	#7, #8, #10
Length	1/2" up to 3"
Head	Hex Head
Material	Carbon Steel
Finish	Zinc
Application	25-20 gauge metal applications

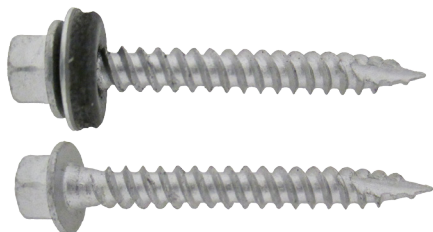

Hex Head Woodgrip w/ Bonded Washer	
Diameter-Thread	#9-15, #10-15, #12-14, #14-10
Length	1" up to 3"
Head	1/4" AF, Hex Head w/ washer
Point Type	Type 17
Material	Carbon Steel, Stainless Steel
Finish	Coated
Options	Available without washer



#17 Hex Head Screw w/ Bonded Washer	
Length	1"
Head	Hex Head w/ Bonded Washer
Material	Carbon Steel, Stainless Steel
Finish	Zinc, Coated
Application	Metal to wood, replacement of 1/4" diameter fasteners, where threads have stripped out

Wood Screws



Bugle Head Deck Screw Course Thread	
Diameter	#6, #8, #10
Length	1" up to 6"
Drive	Phillips or Square
Material	Carbon Steel
Finish	Coated
Manufacturers	Import, Grabber



Square Drive Flat Head w/ Nibs Deck Screw	
Diameter	#8, #10
Length	1" up to 6"
Head	Flat head with nibs
Point Type	Type 17
Material	Carbon Steel
Finish	ACQ approved coating



#8-#14 Phillips Flat Head Wood Screw

Diameter	#6, #8, #10, #12, #14
Length	1" up to 4"
Material	Carbon Steel, Stainless Steel
Finish	Zinc



Hex Head Lag Screws

Diameter	1/4", 5/16", 3/8", 1/2", 5/8", 3/4"
Length	1" up to 12"
Material	Carbon Steel, Stainless Steel
Finish	Zinc



Security Fasteners

We offer a full line of Security Fasteners