

## Adhesives



### Froth-Pak Polyurethane Foam Sealant

Package	Part A & Part B
Available in: Froth-Pak 200 Froth-Pak 620	
Coverage Rate	Froth-Pak 200 - 200 bd ft Froth-Pak 620 - 620 bd ft
MFR	Dow
Storage	75°F
Full Cure	30-40 sec Tack Free - Full cure 5 min

Application temperature:  
60°F-90°F

Froth-Pak Foam Sealant is a two-component, quick-cure polyurethane foam that fills cavities, penetrations, cracks and expansion joints. Froth-Pak can also be used as a sealant and void fill in many roofing applications.



### Insta Stik Commercial roofing adhesive

Package	1 Tank
Coverage Rate	12"o.c. - 8 square
MFR	Dow
Storage	50°F to 75°F
Tack Free	5 min

Insta Stik is not recommended for temps lower than 33°F



### Hose and Wand

A hose and a wand are required to use Insta Stick

Hoses and Wands are sold separately

**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.®



### I.S.O. Stick Insulation Adhesive

Package	5gal Part 1 5gal Part 2
Coverage 5/8"-1" Bead (set)	10 Square - 6"o.c. 20 Square - 12"o.c.
MFR	Firestone
Storage	60°F-80°F
Tack Free	@ 40-90° - 7 min

I.S.O. Stick is not recommended for cold weather applications

**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.®



Twin Pack Insulation Adhesive	
Package	4 Cartridges per case w/nozzles
Coverage	4" o.c. 200ft <sup>2</sup>
1/2" Bead (case)	6" o.c. 300ft <sup>2</sup> 12" o.c. 600ft <sup>2</sup>
MFR	Firestone
Storage	60°F-80°F
Set up times	@ 60°F to 90°F = 5-8 min
	@ 20°F to 60°F = 8-15 min
Twin Pack is suitable for cold weather application with proper storage	

**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.®



XR Stick Adhesive Cartridges	
Package	4 Cartridge kits per case w/ Nozzles
Coverage	4" o.c. 200ft <sup>2</sup>
3/4-1" Bead (set)	6" o.c. 300ft <sup>2</sup> 12" o.c. 600ft <sup>2</sup>
MFR	Firestone
Storage	60°F-80°F
Tack Free	@ 40-90° - 5 min
XR Stick is not approved for cold weather applications	

**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.®



XR Stick Adhesive Bag-n-Box	
Package	5gal Part 1 5gal Part 2
Coverage	10 Square - 6" o.c.
3/4-1" Bead (set)	20 Square - 12" o.c.
MFR	Firestone
Storage	60°F-80°F
Tack Free	@ 40-90° - 5 min
XR Stick is not approved for cold weather applications	

**OMG**  
ROOFING PRODUCTS



OlyBond 500 Insulation Adhesive	
Package	5gal part 1 5gal part 2
Coverage	10 Square - 6" o.c.
3/4-1" Bead (set)	20 Square - 12" o.c.
MFR	OMG
Storage	55°F-85°F
Tack Free	@ 40+° - 3-5 min
OlyBond 500 is not suitable for cold weather applications. Spot Shot winter grade is available in cartridges	



Spot Shot Insulation Adhesive	
Package	4 cartridges per case w/nozzles
Coverage 1/2" Bead (case)	12" o.c. 4-6 square
MFR	OMG
Storage	55°F-85°F
Tack Free	@ 0°F to 65°F = 3-4 min (winter grade)
	@ 40°F+ = 3-5 min (regular grade)
Spot Shot is suitable for cold weather application with winter grade version	



Millennium One Step Foamable Adhesive	
Package	4 Cartridges per case w/nozzles
Coverage 1/2-3/4" Bead (case)	4" o.c. 200ft <sup>2</sup>
	6" o.c. 300ft <sup>2</sup>
	12" o.c. 600ft <sup>2</sup>
MFR	Royal
Storage	65°F-85°F
Set up times	No Wait
One Step is suitable for cold weather application with proper storage	



Millennium PG-1 Pump Grade Adhesive	
Package	5 gal part 1 5 gal part 2
Coverage 1/2-3/4" Bead (case)	20-25 squares
MFR	Royal
Storage	45°F-95°F
PG-1 is not suitable for cold weather application, use Millennium One Step cartridges	



Millennium Universal Primer	
Package	3.5 gal pail
Coverage	150-250 sq ft per gallon
MFR	Royal
Storage	Room temp, keep from freezing
Allow to dry completely	
Applies in one coat	

## Cements and Coatings



### Apoc 365 Eterna-Flash 10.1oz Caulk Tubes

Apoc 365 Eterna-Flash is a high performance flashing cement. Apoc 365 is an extremely versatile modified mastic that provides superior adhesion to wet surfaces, easily bonds under water and is ideal for temporary or permanent repairs.


Packaged	10.1oz caulk tubes
Adhesion Underwater	Excellent
Application Temperatures	35°-120°F
Clean-up Tools	Paint Thinner, Mineral Spirits



### Apoc 365 Eterna-Flash

Apoc 365 Eterna-Flash is a high performance flashing cement. Apoc 365 is an extremely modified mastic that provides superior adhesion to wet surfaces, easily bonds under water and is ideal for temporary or permanent repairs. Apoc 365 is an 'E-Z Spread' durable patching compound even under the harshest weather conditions.

Packaged	3gal Pail
Adhesion Underwater	Excellent
Consistency	Trowel
Application Temperatures	35°-120°F
Clean-up Tools	Paint Thinner, Mineral Spirits



### Apoc 122 Premium Flashing Cement

Apoc 122 Premium Flashing Cement is a professional grade flashing cement that provides superior adhesion to vertical surfaces and even bonds to wet or underwater surfaces. It will not run or sag and is formulated for year round use in adverse weather conditions.

Packaged	5gal Pail
Consistency	Trowel
Application Temperatures	35°-120°F (use winter grade for lower temps)
Clean-up Tools	Paint Thinner, Mineral Spirits



### 19 Ultra Rubberized Wet/Dry Flashing Cement

Packaged	3 Gal Pail
<ul style="list-style-type: none"> <li>•Rubberized elastomeric flashing cement</li> <li>•Best for stopping leaks on wet or dry surfaces</li> <li>•Smooth trowel consistency</li> </ul>	





### 19 Ultra Flashing Cement Caulk

Packaged	10.1oz tube
----------	-------------

- Professional grade rubberized asphalt repair cement
- Smooth consistency for easy use
- Best for emergency repairs
- Use for repairs on wet or dry surfaces and as a shingle tab adhesive
- Elastomeric-makes longer lasting repairs
- Coverage: 25 lineal feet per tube per 1/4" by 1/4" bead



### 502 MS Karna-Flex

Packaged	3 Gal Pail
----------	------------

- One component, elastomeric, SEBS sealant
- Use to patch & repair metal, concrete, spray foam roofs
- Ideal for sealing metal screws & gutters
- Use to repair EPDM, TPO, and PVC
- Forms a durable, weather-resistant membrane
- Superior protection in ponding areas
- Stays flexible even at low temperatures
- White finish color



### 19 Flashing Cement

Packaged	5 Gal Pail
----------	------------

- Smooth trowel consistency
- Excellent general purpose repair cement
- Adheres to vertical & horizontal surfaces



### 108 Asphalt Primer

Packaged	5 Gal Pail. Aerosol Can
----------	-------------------------

- General purpose primer for roofing, damp-proofing, & waterproofing
- Quick drying
- Use to prime asphalt, concrete, masonry, brick, gypsum, wood, metal
- Revitalizes old asphalt felts prior to coating
- Coverage: 0.5-1 gallon per 100 sq. ft.

**KARNAK**  
CORPORATION  
THE SEAL OF QUALITY



### 34 Asphalt Cotton Fabric

**Widths** 4", 6", 9", 12", 18", 40", x 150' Rolls

- Asphalt coated for increased bond of cements & coatings
- Lightweight, unrolls easily
- Open mesh allows cements & coatings to form strong mechanical bond
- Resin coated for use with asphalt or coat tar coatings
- Designed to reinforce roofing repairs & waterproofing applications



### Roofing Trowel

- 7" x 3 3/8" gauging trowel
- Wood handle

## Drains



\*Please see chart at the end of the section for sizing

### Aluminum Classic Drain

The Aluminum Classic Drain is manufactured from spun aluminum. Its one-piece construction is designed for quick installation in new connection and ponded roof applications. The drain can be connected by using the mechanical coupler provided. The drain flange has six welded aluminum studs to secure the aluminum clamping ring and six pre-drilled fastener holes for attachment of the drain to the roof deck. The drain flange has a depressed sump area to facilitate the drainage of all water from the roof surface. The cast aluminum clamping ring by means of 3 stainless steel screws.

#### Features and Benefits

- One-Piece seamless body is made from .125-in., 11 gauge spun aluminum. It provides strength and durability without separation of the flange from the stem.
- Pre-punched flange insures consistent, stable attachment to the roofing substrate eliminating the need for an under-deck clamp.
- Heavy-duty cast aluminum strainer dome for clamping ring - designed to be durable and to ensure a uniform compression seal of the membrane.
- A plastic dome or the cast-aluminum SuperDome are available options.
- No-hub coupler has stainless steel bands that connect with PVC or cast iron plumbing, and will work with schedule 40 or 80 water leaders.

Manufacturer	OMG
Sizes	3", 4", 6"



\*Please see chart at the end of the section for sizing

### Hercules RetroDrain

The industry's most popular retro fit roof drain designed to fit into existing drain leaders in re-roofing applications. One-piece spun aluminum body, heavy duty cast aluminum strainer dome, and clamping ring provide strength and durability. The Hercules RetroDrain incorporates U-Flow Seal technology for a mechanical watertight connection to PVC or cast iron pipes to prevent water from backup damage.

#### Features and Benefits

- One-piece seamless body provides strength and durability without separation of the flange from the stem
- Extra large flange allows positive attachment of roof flashing membrane while the sump area facilitates drainage.
- Cast aluminum strainer dome and clamping ring. 12-in. long drain stem accommodates most existing field conditions with longer lengths available.
- Incorporates U-Flow Seal technology for a secure, watertight connection.
- Also available with a plastic dome or the cast-aluminum SuperDome.

Manufacturer	OMG
Sizes	2", 3", 4", 5", 6"



**\*Please see chart at the end of the section for sizing**

### RAC Deluxe RetroDrain

The RAC Deluxe RetroDrain is constructed of aluminum & stainless steel for durability and designed for use with single ply, BUR and modified bitumen roofing systems. The drain features an extra large flange for positive attachment of the roof flashing membrane, a recessed metal clamping ring for roof termination and proper drainage, along with an oversized drain strainer to minimize damming. The patented RAC Backflow Compression Seal is compatible with PVC or cast iron leader pipes.

**Features and Benefits**

- Drain flange insures consistent, stable attachment to the substrate outside of the existing drain bowl and positive attachment of flashing membrane.
- Strainer dome features a low profile base to promote drainage and the large diameter provides added flow capacity and minimizes damming.
- 9-in. long drain stem accommodates most existing field conditions with custom drain pipe lengths available for quick turn elbows or deep existing drain bowls.
- The aluminum clamping ring is recessed into the drain flange to maximize drainage and is secured to stainless steel studs.
- The RAC Backflow Compression Seal is quickly activated at drain flange level and protects the roofing system and building contents from water backup damage.

Manufacturer	OMG
Sizes	2", 3", 4", 5", 6"



**\*Please see chart at the end of the section for sizing**


### New Connection Drain

Designed for installation in roof areas that pond water or new roof construction. Constructed of aluminum and stainless steel components for durability and designed for use with single ply, BUR and modified bitumen roofing systems, NewCon Drains feature an extra large flange for positive clamping ring for roof termination. In addition, they feature an oversized strainer dome to minimize damming, and a no-hub banded coupler for connecting to PVC or Cast Iron plumbing below deck.

**Features and Benefits**

- Pre-punched, .080-in thick, with and extra large 18-in. aluminum drain flange insures consistent, stable attachment to the roofing substrate and provides a clean surface for adhesion of drain flashing materials.
- Strainer dome features a low profile base to promote drainage and the large diameter provides added flow capacity and minimizes damming.
- 8-in. drain stem accommodates most existing field conditions with longer drain pipe lengths available.
- Clamping ring assembly is recessed into the drain flange to maximize drainage and is secured to stainless steel studs.
- Complete with a no-hub coupler that connects with PVC or cast iron plumbing below deck.

Manufacturer	OMG
Sizes	3", 4", 5"

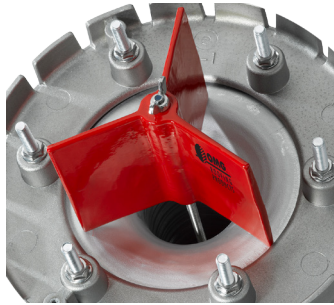

\*Please see chart at the end of the section for sizing

### Redline AFR Roof Drain

With the OMG SpeedTite Mechanical Seal and “drop-in-ready” packaging, the OMG RedLine AFR is the fastest installed drain on the market. The patent pending OMG Red Vortex Breaker helps maintain a constant water flow rate consistent with plumbing requirements.

**Features and Benefits**

- The OMG Red Vortex Breaker (patent pending) combined with maximum inside diameter drain stem is designed for optimum flow performance.
- The OMG SpeedTite Mechanical Seal (patent pending) can be made watertight in seconds without using any tools.
- the hand-tightened seal activator creates a symmetrical watertight connection and prevents the risk of partially over tightening and partially under tightening in the same installation.
- One piece seamless body provides strength and durability.
- Extra-large flange allows positive attachment of roof flashing membrane.
- Heavy duty cast aluminum strainer dome and clamping ring.
- Exceeds ANSI/SPRI RD1.

<b>Manufacturer</b>	<b>OMG</b>
<b>Sizes</b>	<b>3”, 4”</b>



### Expansion Seal (The Premier Seal)

Portals Plus has developed a unique Mechanically Expandable Rubber Seal, “The Premier Seal”. The Drain is designed to replace existing drains in retrofit applications. All installation is conducted on the roof surface. The seal is activated by tightening the internal screws with the Premier Screwdriver. The Seal utilizes PVC flanges for increased strength and stainless steel screws to compress the EPDM rubber gasket. The compression of the seal expands it and makes contact into the existing piping of the pre-existing drain, therefore, preventing vertical movement and stopping water damage into the building. The Premier Seal exceeds SPRI and ANSI Retrofit Drains requirements.

<b>Manufacturer</b>	<b>Portals Plus</b>
<b>Sizes</b>	<b>3”, 4”, 5”, and 6”</b>





## SEAL EXPANSION CAPACITY

### U-Flow Mechanical Seal

### RAC Backflow Compression Seal

Size	O.D. of Pre-Expanded Seal	Fit into min. Pipe I.D.	Fully Expanded
3"	2.86"	2.88"	3.40"
4"	3.74"	3.76"	4.40"
5"	4.73"	4.75"	5.40"
6"	5.75"	5.77"	6.40"

Size	O.D. of Pre-Expanded Seal	Fit into min. Pipe I.D.	Fully Expanded
3"	2.75"	2.77"	3.12"
3.5"	3.31"	3.33"	3.60"
4"	3.85"	3.87"	4.20"
4.5"	4.35"	4.37"	4.69"
5"	4.81"	4.83"	5.12"
5.5"	5.43"	5.45"	5.75"
6"	5.85"	5.87"	6.30"

Due to manufacturing variances and job site inconsistencies, these figures are guidelines and are not guaranteed.

O.D. = Outside Diameter  
 I.D. = Inside Diameter

## Applications Equipment



### Multi-Bead Applicator

The Multi-Bead Applicator can hold up to four dual cartridges of insulation adhesive. You can install up to 6 squares in less than 2 min. Battery powered, no cords or generators required.

Insulation adhesives supported:

Firestone Twin Pack

Firestone XR Stick (cartridge)

Millennium One Step



### Millennium Cyclone 1 by Garlock

The Millennium Cyclone 1 by Garlock is a two part insulation adhesive application machine. It applies one set of bag-n-box at a time, properly mixing both parts as it is applied. Also used to apply fleeceback adhesive.

Compatible Products:

Millennium PG-1

The Millennium Cyclone requires mixing tips. The mixing tips are specially designed to properly mix the bag-n-box adhesive as it is dispensed.



### Multi-Bead Plus Applicator

The Multi-Bead Plus Applicator can hold up to 13 dual cartridges of insulation adhesive. Easy to read label for setting up 12", 6", and 3" o.c. Battery powered, so no need for cords or generators.

Insulation adhesives supported:

Firestone Twin Pack

Firestone XR Stick (cartridge)

Millennium One Step



### Pace Cart 2

OMG Pace Cart 2 is a patented applicator for dispensing bag-n-box. The Pace Cart is capable of dispensing enough adhesive to apply 60 squares of insulation per hour. Lowest installed cost method of application. Runs on 115v power.

Compatible Products:

Firestone ISO Stick

Firestone XR Stick

OlyBond 500

OMG's Pace Cart 2 requires mixing tips. The mixing tips are specially designed to properly mix the bag-n-box adhesive as it is applied. Tips are packaged 20 per bag.



### VEE Manifold

Manufacturer	Rooftop Equipment
<ul style="list-style-type: none"> <li>•Used to apply 2 part adhesive (bag-in-a-box)</li> <li>•Fur use with Millennium Cyclone, and OMG Pace Cart in place of the stock manifolds</li> <li>•Straight tube design for smooth flow</li> <li>•Weights less than stock applicators</li> <li>•No greasing required</li> <li>•Easy to clean out with included drill bit</li> </ul>	



### Manual Applicator

Manufacturer	Albion
<p>Albion's Manual Adhesive Applicator is a single dual cartridge applicator. Specially designed double gripping plates and steel trigger for increased durability. Designed to require less pumps per cartridge. Holds cartridge in place while dispensing and allows easy empty cartridge removal.</p>	
<p>Compatible with dual cartridges.</p>	



### Battery Powered Applicator

Manufacturer	Millennium
<p>The battery powered applicator is a single dual cartridge applicator. The applicator comes with a charger and two 14.4v rechargeable batteries. Design allows upright application, eliminating back strain.</p>	
<p>Compatible with dual cartridges.</p>	



### Pneumatic Applicator

Manufacturer	Albion
<p>Albion Engineering's Pneumatic Applicator has two set up styles for one or two hand operation. More power and faster flow, increases productivity. Responsive with improved trigger control, easy access regulator, and pneumatic forward and reverse. Easy load and unload of cartridge.</p>	
<p>Compatible with dual cartridges.</p>	



### Pneumatic Applicator

Manufacturer	Well Made Tool
<p>Well Made Tool's pneumatic applicator has an aluminum air cylinder that is 4" in diameter. It is also "air in" and "air out". This provides power forward and power reverse for ease of operation. Supplied with built in air regulator at base of handle. Comes with interchangeable side handle for added stability.</p>	
<p>Compatible with dual cartridges.</p>	



### Titan Roller

Manufacturer	Rooftop Equipment Inc.
Size	8", 16"
<ul style="list-style-type: none"> <li>•No adjustable parts</li> <li>•6' aluminum handle</li> <li>•Easy to replace roller</li> <li>•Welded frame</li> <li>•Light weight long reach</li> </ul>	



Better Spreader	
Manufacturer	Rooftop Equipment Inc.
Styles	14" Singlewide 27" Doublewide
<ul style="list-style-type: none"> <li>•Singlewide uses one can of adhesive</li> <li>•Doublewide uses two cans of adhesive</li> <li>•Adhesive dispensed directly from can</li> <li>•No tank or tray to clog or clean</li> <li>•No valves, cranks or messy overflow</li> <li>•Roller change in seconds</li> <li>•Even and efficient spread of adhesive</li> <li>•No end of the day clean-up</li> </ul>	



Tank Spreader	
Manufacturer	Rooftop Equipment Inc.
Styles	14" Singlewide - 5gal Tank
	27" Doublewide - 8gal Tank
	40" Superwide - 10gal Tank
<ul style="list-style-type: none"> <li>•Durable Polyethylene Tank</li> <li>•Easy clean up</li> <li>•Changeable tank</li> <li>•Works with adhesive and coatings</li> <li>•Pre-drilled holes limit waste</li> <li>•Fill - apply - drain</li> <li>•Roller change in seconds</li> <li>•Even and efficient spread of adhesive</li> </ul>	















150lb Fleece Back Roller	
Manufacturer	Rooftop Equipment
<p>Specially made for fleeceback. When the top surface of the rubber roof becomes uneven and wavy with low-rise spray foam adhesive, the 150# membrane roller successfully flattens the membrane.</p> <ul style="list-style-type: none"> <li>•Constant pressure</li> <li>•Easy steering</li> <li>•Five pounds per inch</li> <li>•Ensures smooth application</li> </ul>	



Replacement Rollers	
Manufacturer	Rooftop Equipment Inc.
Box Qty	9pcs, all rollers
<ul style="list-style-type: none"> <li>•14" Singlewide</li> <li>•16" Titan</li> <li>•27" Doublewide</li> <li>•40" Superwide</li> </ul>	



Profile Rollers													
Manufacturer	Rooftop Equipment Inc.												
Lengths	8", 14"												
<p>Used to apply roof coating on metal roofs. It is specifically designed to fit metal panel ribs.</p>													
Available Styles	<table border="0"> <tr> <td>•AG panel</td> <td>•R panel</td> <td></td> </tr> <tr> <td>•High R panel</td> <td>•Snap lock</td> <td></td> </tr> <tr> <td>•Single lock</td> <td>•Batten</td> <td></td> </tr> <tr> <td>•Trapezoid</td> <td></td> <td></td> </tr> </table>	•AG panel	•R panel		•High R panel	•Snap lock		•Single lock	•Batten		•Trapezoid		
•AG panel	•R panel												
•High R panel	•Snap lock												
•Single lock	•Batten												
•Trapezoid													
<p>Side swipe roller available for single lock roof panels to apply inside vertical seam</p>													

## Automated Tools



### AccuSeam

Manufacturer	OMG
--------------	-----

The stand-up OMG AccuSeam system mechanically attaches PVC & TPO system. In one step, the lap plate is placed in position by the AccuSeam tool as the laborer drives the fastener, eliminating the need for one laborer (where normally two would be required), thereby increasing productivity. This simple and easy-to-operate tool minimizes operator fatigue as it eliminates the constant bending-over method of fastening.



### RhinoTrac

Manufacturer	OMG
--------------	-----

OMG RhinoTrac is an automated insulation attachment tool for installing RhinoBond plates and fasteners. RhinoTrac simultaneously drops a RhinoBond plate and drives the fastener, saving both time and manpower. This easy-to-operate tool minimizes operator fatigue as it eliminates bending or kneeling to drive screws.



### AccuTrac

Manufacturer	OMG
--------------	-----

The OMG AccuTrac is an automated insulation attachment system. This simple and easy-to-operate tool minimizes operator fatigue as it eliminates the constant bending-over method of fastening.



Turn ideas into reality.



### Isofast

Manufacturer	SFS Intec
--------------	-----------

The Isofast installation system uses collated fasteners and plates

- Belted fasteners and plates increase productivity and allows the contractor to install the roof assembly in an upright position when using the IF160 or IF240 installation tool.
- #12 belted Dekfast for insulation attachment
- #15 Dekfast for membranes attachment
- Isofast plates are stacked for easy loading into the Isofast tool
- Three different styles of plates available





### Tall Boy

Manufacturer	OMG
<p>The OMG Tall Boy roof fastener installation tool is designed for ASAP installation and supplied with a specially designed 0-2,500 RPM screw gun. The drill depth is easily adjusted to ensure that the fastener is not overdriven. The screw gun is a Milwaukee MS6799-69.</p> <p><u>Features and Benefits</u></p> <ul style="list-style-type: none"> <li>•Screw gun included</li> <li>•Easy depth adjustment eliminates overdriving fasteners</li> <li>•Works with OMG ASAP with 3" locking plastic plate and OMG ASAP with 2" plate</li> <li>•Universal stabilizing nose cone (works with all OMG ASAP's) with steel insert to increase performance</li> </ul>	



### Trufast PA Tool

Manufacturer	Trufast
<ul style="list-style-type: none"> <li>•For use with pre-assembled screws and plates</li> <li>•Tool features a Milwaukee Model MILW 6792-20 (2500 rpm) screw gun</li> <li>•29" attachment</li> <li>•Eliminates back strain fasten insulation without bending</li> <li>•Works with PA (Phillips head) and PAH (hex head) fasteners</li> </ul>	



### Base Sheet Fastener Driver

Magnetic driver for installing base sheet fasteners to attach recovery board or base ply to wood fiber or poured gypsum. Heavy-duty construction including steel shaft and high density head with super strong gripping magnet. Handheld base sheet driver also available. For the hard to reach areas and under HVAC units.

## Heat Induction Tools



### RhinoBond Tool

Manufacturer	OMG
<p>RhinoBond is a superior attachment system for TPO and PVC membranes based on patented electromagnetic induction welding technology. The system uses the same fastener and plate to secure both the insulation and the membrane to the deck without penetrating the roofing material. The result is a Factory Mutual-approved system that does not create any point of entry for moisture, requires fewer fasteners and provides superior wind uplift performance.</p> <p>Each RhinoBond tool comes with six (6) Rhino-Bond magnets.</p>	




### IsoWeld Heat Induction Tool

Manufacturer	SFS Intec
<p>The IsoWeld field fastening system uses induction technology and offers a non-penetrating solution. Secure attachment is achieved through the welding of the membrane to a dedicated SFS Intec stress plate.</p> <p><u>IsoWeld Advantages</u></p> <ul style="list-style-type: none"> <li>•Search and control function</li> <li>-properly locates plate for 100% plate coverage</li> <li>•Temp and Power consumption</li> <li>-automatically adjusts weld parameters with change in membrane temp</li> <li>•Hand-held inductor</li> <li>-for welding in tight spaces near rooftop protrusions and on parapet walls</li> </ul>	

## Heat Welding Tools

### SIEVERT®

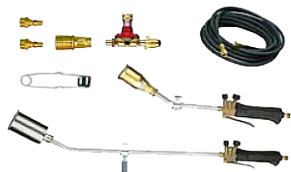

#### CS4461

Manufacturer	Sievert
--------------	---------

•Combination kit comes with two torches and quick connects for an easy change out between the detail and field torch.

Includes

- 32" torch assembly with stand
- 18" torch assembly with stand (85,000/1000,000 BTU)
- Quick connect for handle (2)
- 25' U/L listed hose
- U/L listed hand tightened regulator
- Flint striker

### SIEVERT®



#### DS2944

Manufacturer	Sievert
--------------	---------

•Turboroofers detail torch kit. Ideal for flashings and small detail work.

Includes

- 18" torch assembly with stand
- 25' U/L listed hose
- U/L listed hand tightened regulator
- Flint striker

### SIEVERT®



#### PS2960

Manufacturer	Sievert
--------------	---------

•Features a powerful windstable flame  
 •Handle has dual knobs

Includes

- 32" torch assembly
- 25' U/L listed hose
- U/L listed hand tightened regulator
- Flint striker

### SIEVERT®



#### URK-4 Ultimate Repair Kit

Manufacturer	Sievert
--------------	---------

The most convenient repair kit available for repairing modified bitumen and single ply roofs. Kit contains one handle and two burners providing repair crews the ultimate in flexibility.

Includes

- Sievert Promatic universal handle
- Small standard flame burner
- Hot air burner
- 4' hose/regulator assembly
- Canvas carrying bag

**SIEVERT**



**RKH-RS Single Ply Repair Kit**

Manufacturer	Sievert
--------------	---------

Propane powered Hot-Air Welder that is less expensive and more convenient than electric versions. Your best option for safe, fast repairs of single ply membranes. No open flame.

Includes

- Sievert Promatic universal handle
- Hot-air burner
- 4' hose/regulator assembly
- Canvas carrying bag

**SIEVERT**



**PNS-4 Hot Air Peel-N-Stick Kit**


Manufacturer	Sievert
--------------	---------

PNS-4 works well for repairs and small heating jobs - particularly details or heating peel-n-stick membranes without an open flame.

Includes

- Sievert Promatic universal handle
- Hot-air burner
- Flat nozzle for directional heating
- 4' hose/regulator assembly
- Canvas carrying bag

**SIEVERT**

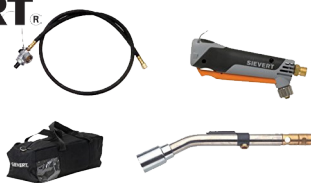

**RKD-4 Repair Kit**

Manufacturer	Sievert
--------------	---------

Offers safe, fast & convenient repairs of modified bitumen membranes. Comes with a hook that can easily attach to belt. This can also be used as a "core cut" kit-perfect for estimating.

Includes

- Sievert Promatic universal handle
- Small standard flame burner
- 4' hose/regulator assembly
- Canvas carrying bag

**SIEVERT**



**SIK 1-04**

Manufacturer	Sievert
--------------	---------

•Complete soldering iron kit

Includes

- Sievert promatic soldering iron
- 12oz copper soldering bit
- 4' hose/regulator assembly
- Canvas carrying bag

**SIEVERT®**



**3366-97**

Manufacturer	Sievert
Universal handle allows you to change burners in seconds. Automatic trigger start piezo ignition allows you to instantly ignite and extinguish flame with one hand. Adjustable flame control knob is great for detail work. Fits up to 16 different burners. •Male LH 9/16" threads	

**SIEVERT®**



**Pro 86 Copper Bits**

Manufacturer	Sievert
<ul style="list-style-type: none"> <li>•10oz copper hammer bit</li> <li>•10oz long life copper bit</li> <li>•19oz copper hammer bit</li> <li>•19oz long life copper bit</li> <li>•13oz copper pointed bit</li> </ul>	

**SIEVERT®**



**Promatic Copper Bits for 3370-37**

Manufacturer	Sievert
<ul style="list-style-type: none"> <li>•12oz copper hammer bit</li> <li>•12oz long life copper bit</li> <li>•14oz copper pyramid bit</li> <li>•18oz copper hammer bit</li> <li>•18oz long life bit</li> <li>•2.5oz copper bit</li> </ul>	

**SIEVERT® COMING SOON**



**DW 2000**

Manufacturer	Sievert
DW 2000 is specially designed for handling the toughest heating jobs with precision and ease. The revolutionary ergonomic design makes the welder lightweight and easy to handle. •Automatic cool down mode •Two step fan control •Built in volt meter	

**SIEVERT<sup>®</sup>**



**TW 5000**

Manufacturer	Sievert
The Sievert TW 5000 can weld any membrane: Such as plastic, rubber, and modified bitumen.	
<ul style="list-style-type: none"> <li>•Four-wheel drive and belt system for wrinkle-free welding</li> <li>•Powerful engine</li> <li>•Digital display unit for control</li> <li>•Runs on 400 V or 230 V</li> <li>•Powerful fan for high-speed welding</li> <li>•Automatic start/stop sensor</li> </ul>	

**SIEVERT<sup>®</sup>**



**G14000 Heavy Duty Generator**

Manufacturer	Sievert
<ul style="list-style-type: none"> <li>•688cc Honda GX630 engine</li> <li>•Brushless heavy duty alternators</li> <li>•Frame mounted 8 gallon fuel tank</li> <li>•Max output - 14,000 watts</li> <li>•Continuous output - 11,700 watts</li> <li>•Key electric start engine</li> <li>•Circuit breaker protection each outlet resettable</li> <li>•Engine protection system-oil guard</li> </ul>	

**SIEVERT<sup>®</sup>**



**Accessories for DW 2000**

Manufacturer	Sievert
<ul style="list-style-type: none"> <li>•Seven nozzles available</li> <li>•Reduction (5mm)</li> <li>•Angle Slit (40x2mm)</li> <li>•Reduction (10mm)</li> <li>•90° angle nozzle for overlap welding</li> <li>•Replacement heating element</li> <li>•Angle Slit (20x2mm)</li> <li>•Angle Slit (80x2mm)</li> <li>•Plastic welding nozzle</li> </ul>	

**SIEVERT<sup>®</sup>**



**7990-30 Welding Nozzle for Single Ply Material**

Manufacturer	Sievert
High quality welding nozzle made of sturdy stainless steel. Designed specifically for the TW 5000.	



**SIEVERT<sup>®</sup>**



**7990-70 TW 5000 Welder Box**

Manufacturer	Sievert
Sturdy box made of steel. Footed, offering you the ability to insert forks underneath. Comes standard with exterior handles and interior straps.	

**SIEVERT<sup>®</sup>**



**2993-01 9lbs Additional Weight**

Manufacturer	Sievert
Additional weight for adding pressure when welding special demanding material.	

**SIEVERT<sup>®</sup>**



**7990-10 Sievert Welding Belt**

Manufacturer	Sievert
A 6" wide silicone belt designed for the TW 5000. Designed to help eliminate wrinkles and offer more welding stability.	

**SIEVERT<sup>®</sup>**



**Cables and Plugs**

Manufacturer	Sievert
<ul style="list-style-type: none"> <li>•100' 10/3 cord</li> <li><u>Available in</u></li> <li>•Cord with no plugs</li> <li>•Cord with female outlet - recommended when not using Sievert</li> <li>•Cord with male &amp; female outlets - recommended use with Sievert</li> <li><u>Plugs available</u></li> <li>•Male plug - twist lock</li> <li>•Female plug - twist lock</li> <li>•Male plug - straight body plug</li> </ul>	

**SIEVERT<sup>®</sup>**



**7990-47 Replacement Heating Element**

Manufacturer	Sievert
230 V ceramic hand-wired encapsulated heating element specially designed for the TW 5000.	

## Hand Tools



### Seam Roller with Wood Handle

<b>Manufacturer</b>	Everhard
<b>Sizes</b>	1 7/16" x 1 3/4", 2" x 2", 4" x 4"
<ul style="list-style-type: none"> <li>•Rollers are heat-resistant silicone</li> <li>•Rollers come standard with 5" wood handle, enclosed bearings, an either a single or double fork (4x4), which secures the roller head into the handle</li> </ul>	



### Seam Roller with Ergonomic Handle & Seam Tester

<b>Manufacturer</b>	Everhard
<b>Size</b>	1 7/16" x 1 3/4"
<ul style="list-style-type: none"> <li>•Seam tester fitted into other end of roller lets you quickly and easily check seams right after rolling them out</li> <li>•Combo tool stays well balanced in your hand, letting you roll out the seam and immediately test with no "pick up and put down" of different tools</li> <li>•Versatile seaming tool performs many roofing tasks: ROLL-TEST-TAMP-PROBE</li> <li>•Roller made with heat-resistant silicone</li> <li>•Roller has a single extended offset fork</li> <li>•Cushion grip handle</li> </ul>	



### Seam Roller with Ergonomic Handle

<b>Manufacturer</b>	Everhard
<b>Size</b>	1 7/16" x 1 3/4"
<ul style="list-style-type: none"> <li>•Rollers are heat-resistant silicone</li> <li><u>Ergonomic features give you</u></li> <li>•Better COMFORT</li> <li>•Better SIGHT LINE</li> <li>•Better CLEARANCE</li> <li>•Roller has a single extended offset fork</li> <li>•Cushion grip handle</li> </ul>	



### Convertible Seam Tester

<b>Manufacturer</b>	Everhard
<b>Length</b>	10 1/4"
<ul style="list-style-type: none"> <li>•A hand-held model that converts to a stand-up seam</li> <li>•Test seams to make sure they hold properly</li> <li>•Locate loose portions of seams for rework</li> <li>•Hand-held seam testers good for detail work in small areas</li> <li>•Stand-up seam testers are ideal for general finishing work and final seam checks</li> </ul>	



**Insulation Knife (Barret Knife)**

Manufacturer	Everhard
<ul style="list-style-type: none"> <li>•New 3 5/8" long blade lets you cut through thicker insulation</li> <li>•The precision ground blade is double-beveled on all three sides</li> <li>•Hardened and tempered for strength, the blade stays rigid, but is flexible enough not to break</li> <li>•7 1/2" overall length</li> <li>•3 5/8" beveled high carbon spring blade</li> <li>•Plastic, non-rollaway handle</li> </ul>	



**Nylon "V" Roller**

Manufacturer	Everhard
Size	2" x 7/16"
<p>Everhard's detail "V" rollers provide greater ease in seaming tight angles and performing detail work around fixtures and in corners. 5" hardwood handle and enclosed bearings provide balance and smooth rolling action. Our single-end detail "V" rollers have hubs that taper to a 5/64" rounded edge radius that won't cut membrane material</p> <ul style="list-style-type: none"> <li>•Roller made from durable nylon</li> </ul>	



**Roofing Membrane Slitter**

Manufacturer	Everhard
<ul style="list-style-type: none"> <li>•For TPO and PVC membranes</li> <li>•Lightweight and compact</li> <li>•Bottom guide slides under membrane and forces membrane into cutting blade</li> <li>•Sloping nose allows easy tracking of cutting line</li> <li>•Blade safely mounted in secure housing</li> <li>•Easy to replace and rotate blade</li> <li>•Replacement blades available (sold separately in 5 packs)</li> <li>•Use three hole slitter blades</li> </ul>	



**Non-Stick Shear**

Manufacturer	Everhard
<ul style="list-style-type: none"> <li>•Made with a new specialized industrial release coating</li> <li>•Unmatched non-stick surface: industrial release coating has superior no-stick characteristics, no other shear comes close, adhesives and tapes pull off easily</li> <li>•Shears are hot-forged, through-hardened carbon steel, providing durability and longer-lasting sharp edges</li> <li>•Large comfortable handles fit all hand sizes</li> <li>•Shears are 10" bent trimmers, with offset handles - great for cutting roofing materials (including peel-and-stick tapes) and the 10" blades are ideal for long straight cuts</li> </ul>	



**Lightweight Stainless Steel Bent Trimmer**

Manufacturer	Everhard
<ul style="list-style-type: none"> <li>•10" bent trimmer with offset handles</li> <li>•Multi-purpose stainless steel shears</li> <li>•These shears do heavyweight work but weigh less</li> <li>•Can be used right or left handed</li> <li>•Stamped, stainless steel blades are precision-ground and heat-treated</li> <li>•Comfortable blue molded handles</li> </ul>	



**Bent Trimmer with Ergonomic Handle**

Manufacturer	Everhard
<ul style="list-style-type: none"> <li>•Carbon steel trimmers have chrome over nickel plating</li> <li>•Shears will easily cut rubber, cord, and multiple layers of fabric</li> <li>•Ergonomic handle</li> <li>•Large ring extended bottom handle for added cutting leverage</li> <li>•10" bent trimmer with offset handles</li> </ul>	



**Drywall Saw**

- 6" blade
- Wood handle
- Double sided teeth
- Ground teeth ideal for wallboards, drywall, and wood
- Narrow blade for working on awkward cuts
- Used for cutting roof insulation

## On Deck Equipment



Powered By  
**HONDA**



### Razer Tearoff Machine

Manufacturer	Roofmaster
--------------	------------

Roofmaster Razer Tear-Off Machine features:

- Latest Hydrostatic Trans-axle
- No Hydraulic Hoses or Tank
- Easy Access for Field Maintenance
- Heavy Duty Frame
- Industrial Precision Bearings and Camshaft with 4 Port Grease Block
- Adjustable Blade Made of Hardened Special Alloy Steel
- 13HP Honda Electric Start Engine
- Low Center of Gravity at 580 lbs



Powered By  
**HONDA**



### 11hp Surface Planer

Manufacturer	Roofmaster
--------------	------------

All Rotary Action Planing Machines feature single lever adjustable cutting height, inset rear wheel for close-up work, pulley enclosed in safety shroud and 8x2.50 semi-pneumatic tires. 12" solid steel fly-wheel with four carbide-tipped scratcher teeth will spud a 12" path to within 1" of walls, up to 10 squares per hour. 11 hp Honda syncro-balanced engine with belt and pulley.



Powered By  
**HONDA**



### 13hp Honda Single Roof Saw

Manufacturer	Roofmaster
--------------	------------

Roofmaster power saws are made of the highest quality steel components in the industry. All engines are state-of-the-art technology conforming to all Federal & State regulations while producing the highest optimum performance possible. A very important feature is the Uni-tracking ability that allows the saw to cut in a true straight-line and prevents drifting while cutting (other saws tend to drift off-line). Features: 13hp Honda Engine Ergonomically balanced for LESS fatigue Remote Breather helps engine stay cleaner & run cooler 12" Carbide Tipped Blades Cutting depth: 0" to 3.5" (with 14" blades)



Powered By  
**HONDA**



### RM 9 hp Honda Single Saw

Manufacturer	Roofmaster
--------------	------------

Roofmaster power saws are made of the highest quality steel components in the industry. All engines are state-of-the-art technology conforming to all Federal & State regulations while producing the highest optimum performance possible. A very important feature is the Uni-tracking ability that allows the saw to cut in a true straight-line and prevents drifting while cutting (other saws tend to drift off-line). Features: 9hp Honda Engine Ergonomically balanced for LESS fatigue Remote Breather helps engine stay cleaner & run cooler 12" Carbide Tipped Blades Cutting depth: 0" to 3.5" (with 14" blades)





**18x850 - 4 Wheel Trailer**

Manufacturer	Roofmaster
<p>Heavy Duty Material Trailer!! 30"x60" deck dimensions with Heavy duty 2" channel frame. 22" deck height. It comes with 18x850 Pneumatic tires (Non-Flat Lite tires available). Self adjusting drop brake with "T" handle for easy pulling. Stake pockets for channel riser and corner pin pockets for rolled goods. Pins included with attaching chains. Roller bearings in wheels for smooth rolling. Open back frame for hoisting fork or forklift access. Rear hitch and front pin hitch for the ability to form train of trailers. Pins included. 2000 lbs capacity.</p>	



**55 Gal Insulated NFL Hotmaster**

Manufacturer	Roofmaster
<p>Once it's hot, keep it hot - the HOTMASTER is constructed using a pressure-tested steel drum, mounted on a well-balanced cart with three 400x8 Non-Flat Lite tires, one a locking swivel wheel. Insulated model is covered with 2" thick fiberglass and set inside a sheet metal out shell. Includes a 2.5" Draw-off Valve set 27" above ground level.</p>	



**2 Wheels**



**4 Wheels**



**Insulation Cart with Rear Wheel Option**

Manufacturer	Roofmaster
<p>Roofmaster has designed this insulation carrier cart to maximized loading efficiencies on-ground or on-deck with the least amount of effort by the operator. A 3-position slider allows the operator to change the angle of the load based on weight, size &amp; height of the man. It is capable of carrying ISO board, plywood or other large sheet goods of several hundreds of pounds (over 800)! Fold-up forks allow for easy transportation &amp; storage. It's available with either 2-wheels or 4-wheels (4-wheel model recommended for greater flexibility) and the rear wheels are removable if desired. Side-to-side sliding rear wheels make turning with heavy loads easier on the operator. Roofmaster Insulation Carrier with (2 each) 18x8.50 Pneumatic Tires and (2 each) rear 4.00x8 Pneumatic tires.</p>	



**NFL Long Handle Double Steel Wheelbarrow**

Manufacturer	Roofmaster
<p>This is a Roofmaster Steel Handled wheelbarrow with two pneumatic 400 x 8 Non Flat Lite wheels, Long Steel Handles with cushioned hand grips, a 6 cubic foot Steel Tray and includes a Dump Plate in front to help from tearing up the roof deck when dumping. This wheelbarrow is designed so that you don't hit your shin on the front brace. This wheelbarrow will transport like it were on a rail and without any annoying flat tires.</p>	

## Fasteners



### #12 Phillips Truss Head Roofing Screw

#3 Phillips Drive	Drill Point
Packaged	1000, 500 Based on Length
Lengths	1", 1 5/8", 2 1/4", 2 7/8", 3", 3 1/4", 3 3/4", 4", 4 1/2", 5", 6", 7", 8"
Materials	16-22ga Corrugated Steel Wood
Manufacturer/ Coating	Dekfast - Standard Gray E=Coat OMG- CR-10 Tru-Fast - Black E-Coat
Hex Head Also Available	



### #14 Phillips Truss Head HD Roofing Screw

#3 Phillips Drive	Drill Point
Packaged	1000, 500, 250 Based on Length
Lengths	1 1/4", 1 1/2", 1 3/4", 2", 2 1/2", 3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 7", 8", 9", 10", 11", 12", 14", 16"
Materials	16-22ga Corrugated Steel Wood Structural Concrete
Manufacturer/ Coating	Dekfast - Standard Gray E=Coat OMG- CR-10 Tru-Fast - Black E-Coat



### #14 Phillips Truss Head S.S. Roofing Screw

#3 Phillips Drive	Drill Point
Packaged	1000, 500, 250 Based on Length
Lengths	1 1/2", 2", 3", 4", 5", 6", 7", 8", 9", 10", 12"
Materials	16-22ga Corrugated Steel Wood Structural Concrete
Manufacturer	Firestone, Tru-Fast



### #15 Extra Heavy Duty Phillips Truss Head Roofing Screw

#3 Phillips Drive	Drill Point
Packaged	1000, 500, 250 Based on Length
Lengths	1 1/4", 2", 3", 4", 5", 6", 7", 8", 9", 10", 11", 12", 14", 16", 18", 20", 22", 24", 26", 28"
Materials	Steel - 26g-18g Plywood Wood 2x Structural Concrete
Manufacturer/ Coating	Dekfast - Standard Gray E=Coat OMG- CR-10 Tru-Fast - Black E-Coat



#12 Pre-Assembled Roofing Screws	
#3 Phillips Drive	Drill Point
Packaged	500, 250, 200 Based on length/MFR
Lengths	1", 1 5/8", 2 1/4", 2 7/8", 3 1/4", 3 3/4", 4 1/2", 5", 6", 7", 8"
Manufacturer/Coating	Dekfast - Standard Gray E-Coat OMG - CR-10 Tru-Fast - Black E-Coat
Each Pre-Assembled comes with a 3" Galvalume Insulation Plate. Hex Head also available #14 & #15 Pre-Assembled available	



Lite Deck Screw	
#3 Square Drive	Sharp Point
Packaged	500, 250, 125 Based on length
Lengths	2 5/8", 3", 4", 5", 6", 7", 8", 9", 10", 12"
Manufacturer/Coating	OMG - CR-10
<p><b>FEATURES &amp; BENEFITS</b></p> <ul style="list-style-type: none"> <li>•The OMG Lite-Deck Fastener is F.M. and Miami-Dade County approved.</li> <li>•Deep, coarse thread provides high pullout resistance.</li> <li>•Can be installed into cementitious wood fiber decks without predrilling.</li> </ul>	



BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.®



Firestone All Purpose Fastener	
#3 Phillips Drive	Drill point
Lengths	1 1/4", 1 5/8", 2 1/4", 2 7/8", 3 1/4", 3 3/4", 4 1/2", 5", 5 1/2", 6", 7", 8"
MFR	Firestone
Property	Typical Performance
Material	SAE 1022, Heat Treated Steel
Thread Size	0.235" (6.5mm)
Threads/Inch	13
Thread Design	Symmetrical
Fastener Tip	Drill Point
Fastener Head	#3 Phillips Drive
Pullout in New 22 Gauge (0.75mm)	Steel Deck
Grade C (Grade 33)	360lb (163.3 kg)
Grade E (Grade 80)	400lb (191.4 kg)
Pullout in New 3/4" (19.0mm) Plywood Deck	400lb (191.4 kg)
Corrosion Resistant Coating	Electrocoating of Firestone's Red and White fasteners both exhibit 15% or less red rust after 30 cycles of Kesternich and exceed requirements of FM 4470.
Package	1000, 500 Based on Size

## Firestone

BUILDING PRODUCTS

NOBODY COVERS YOU BETTER.®



### Firestone Heavy Duty Fastener

#3 Phillips Drive	Drill point
Lengths	1 1/4", 2", 3", 4", 5", 6", 7", 8", 10", 12", 14"
MFR	Firestone
Property	Typical Performance
Material	SAE 1022, Heat Treated Steel
Thread Size	0.275" (6.98mm) Nominal Diameter
Threads/Inch	13 min.
Thread Design	Buttress thread
Fastener Tip	Drill Point design
Fastener Head	#3 Phillips Drive
Pullout in New 22 Gauge (0.75mm)	Steel Deck
Grade C (Grade 33)	595lb (270 kg) min.
Grade E (Grade 80)	650lb (295 kg) min.
Pullout in New Structural Concrete	700lb (317.5 kg) min.
Pullout in New 3/4" (19.0mm) Plywood Deck	360lb (163 kg) min.
Corrosion Resistant Coating	Electrocoating of Firestone's Red and White fasteners both exhibit 15% or less red rust after 30 cycles of Kesternich and exceed requirements of FM 4470.
Package	500, 250, 125 Based on size

## Firestone

BUILDING PRODUCTS

NOBODY COVERS YOU BETTER.®



### Firestone Pre-Assembled

#3 Phillips Drive	Drill Point
Lengths	All Purpose 2 1/4", 2 7/8", 3 1/4", 3 3/4", 4 1/2", 5", 6", 7", 8"
	Heavy Duty 3", 4", 5", 6", 7", 8", 10"
MFR	Firestone
All Purpose and Heavy Duty Pre-Assembleds come with a 3" Galvalume steel plate	
Package	500, 250, 250, 125 Based on size



### Concrete Drive Fastener (concrete spike)

Manufacturer	Firestone, Powers, Trufast
Packaged	100, 250, 500
Lengths	1 1/4", 1 1/2", 2", 2 1/2", 3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 6 1/2", 7", 7 1/2", 8", 9", 10", 11", 12", 13", 14", 15", 16"
<p>The Concrete Spike Fastener is a one-piece, vibration-resistant anchor designed to fasten insulation, single-ply roof membrane, wood, and steel to structural concrete roof decks. Featuring an "S" shaped configuration at the working end of the fastener to create an expansion mechanism, it provides a fast, reliable fastening solution for structural concrete roof applications.</p>	
*Not all sizes available with all manufacturers.	



Pancake Head Self Drill Clip Screw	
Diameter	#10, #12
Length	1" up to 2"
Head	Standard Pancake
Drive	Square, Phillips, Quadrex
Point Type/ Drill and Tap Capacity	Self Drill #3
	#10- .036 to .175 #12- .036 to .210
	Self Drill #5
	#12- .075 to .500
Finish	Zinc, Coated*, Stainless Steel
Manufacturers	Buildex, Elco, SFS, International Fasteners



S.I.P. Screw/Nail Board Fastener	
T-30 Torx, #3 Square Drive	
Packaged	500, 250 Based on length
Thread pt Lengths	2", 2 1/2", 3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 6 1/2", 7", 7 1/2", 8", 9", 10", 11", 12", 13", 14", 15", 16", 18"
Drill Pt lengths	3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 6 1/2", 7", 7 1/2", 8", 9", 10", 11", 12", 13", 14", 15", 16", 18"
HD Lengths	6", 8", 9 3/4", 11 3/4", 13 3/4"
Manufacturer/ Coating	Dekfast - Standard Gray E-Coat Tru-Fast - Black E-Coat
For use in attaching panels to corrugated steel deck and wood	
Available in Thread Point, Drill Point, and HD Drill Point	



CD-10	
Manufacturer	OMG, GAF
Packaged	250, 500
Lengths	2", 2 1/2", 3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 7", 8", 9", 10", 11", 12"
The OMG CD-10 is a hammer-in, non threaded fastener designed to secure insulation and single-ply membrane to structural concrete.	



Powerlite Polymer Auger	
1/4" Square Drive	1" O.D. Head
Packaged	500, 250 Based on size
Lengths	2", 2 1/2", 3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 6 1/2", 7", 7 1/2", 8", 8 1/2", 9", 9 1/2", 10", 11", 12", 13", 14"
MFR	Powers, Firestone
The Powerlite is a fastener used to mechanically attach rigid insulation board and single-ply membrane to structural cement wood fiber, gypsum, and light-weight insulating concrete roof decks.	





### Polymer GypTec

1/4" Square Drive	1" O.D. Head
Packaged	500, 250 Based on size
Lengths	2 1/2", 3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 6 1/2", 7", 7 1/2", 8", 8 1/2", 9", 9 1/2", 10", 10 1/2", 11", 11 1/2", 12"
MFR	OMG

The OMG Polymer GypTec is a glass-filled nylon auger fastener with a 1-in. head designed to secure insulation and single-ply membrane to gypsum and cementitious wood fiber (i.e., Insulrock, Permadeck, Tectum, etc.)

### Pancake Head Sharp Point Clip Screw


Diameter	#10, #12
Length	1" up to 2"
Head	Standard Pancake, Ultra Low Profile
Drive	Square, Phillips, Quadrex
Point Type	Type A, Type 17
Finish	Zinc, Coated*, Stainless Steel
Manufacturers	Buildex, Elco, SFS, International Fasteners.



### Purlin Fastener

#3 Square Drive/Hex Head	Drill Point
Packaged	2500, 1000, 500, 250
Lengths	1 3/8", 2 3/4", 3 3/4", 4 3/4", 5 3/4", 6 3/4", 7", 7 3/4", 8", 8 3/4"
Materials	Designed to drill into structural steel purlins.
Manufacturer/Coating	Dekfast - Standard Gray E-Coat Firestone - Black E Coat OMG- CR-10 Tru-Fast - Black E-Coat

### TRUFAST

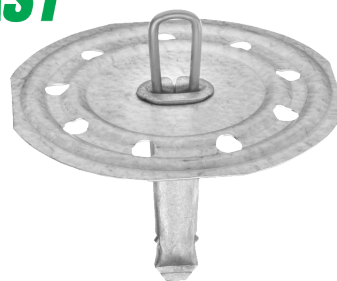


### Twin Loc-Nail

Manufacturer	Trufast / ES Products
Lengths	1.4", 1.8", 2.8", 3.8", 4.8"
Packaged	250, 500
Twin Loc-Nails are ideal for base sheet and insulation attachment to light-weight insulating concrete, cementitious wood fiber (Tectum) and poured gypsum roof decks.	



**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.®

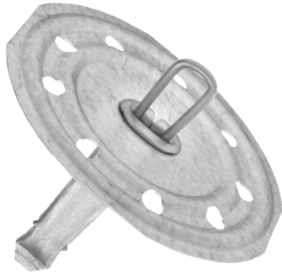

Two Piece Impact Nail	
Manufacturer	Firestone
Lengths	1.4", 1.8", 2.8", 3.8", 4.8"
Packaged	250, 500
<p>The Firestone Two Piece Impact Nail is specifically designed to be used in all Firestone asphalt roof systems to attach base sheets to lightweight insulating or cellular concrete, tectum, or gypsum roof decks. Featuring a galvanized body with a stainless steel locking staple the two piece nail provides for maximum corrosion resistance. It is suitable for use with all FMRC-approved base sheets.</p>	



OlyLok Locking Impact Nail	
Manufacturer	OMG
Lengths	1.4", 1.8"
Packaged	500
<p>The OlyLok Locking Impact Nail is designed to attach a base-ply, recovery board and insulation to wood fiber-poured gypsum decks. It is available in two sizes 1.4in. and 1.8in. and is Factory Mutual and Dade County approved.</p>	

**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.®



Lightweight Concrete Base-Ply Fastener (LWC)	
Manufacturer	Firestone
Lengths	1.2", 1.7"
Packaged	1,000
<p>The Firestone LWC Base-Ply Fastener is specifically designed to be used in all Firestone asphalt roof systems to attach base sheets to lightweight insulating or cellular concrete decks or gypsum roof decks. It is suitable for use with all FMRC-approved base sheets.</p>	



CR Base Sheet Fastener	
Manufacturer	OMG
Lengths	1.2", 1.75"
Packaged	500, 1,000
<p>OMG CR Base Sheet Fasteners are one-piece, precision formed from G-90 galvanized steel, coated with CR-10, and pre-assembled with a 2.75in. diameter galvalume plate. These fasteners are designed to secure base sheets to poured lightweight insulating concrete. The 1.2 CR Base Sheet Fastener can also be used on certain poured gypsum decks.</p>	

ROOFING - FASTENERS

## TRUFast



### FM Series Fastener

Manufacturer	Trufast / ES Products
Part-Length	FM-75 - 1.2" FM-90 - 1.7" FM-290 - 1.7"

FM Series Fasteners are designed for base sheet attachment to lightweight insulating concrete and pour gypsum roof decks.

#### PRODUCT FEATURES

- FM Series Fasteners are Factory Mutual and Miami-Dade County approved.
- FM Series Fasteners feature a galvalume plate and polymer coated steel legs to prevent corrosion.



### 2" Membrane Plate

Package	1000 pail
Material/Coating	Steel/Galvalume
Manufacturers	Firestone
	Dekfast
	OMG
	Trufast

Attaches single-ply membrane to the substrate.

2" Barbed Seam Plate also available



### Accutracs Plates

Manufacturer	OMG
1000 Pail	3" x 3" Square Plate
Styles	Flat Bottom
	Recessed
Material/Coating	Steel/Galvalume

Specially designed for use with OMG's Accu-Trac tool to attach insulation. See page 51 for more information on the AccuTrac tool.




### 3" Insulation Plate

Package	1000 pail
Material/Coating	Steel/Galvalume
Manufacturers	Firestone
	Dekfast
	OMG
	Trufast

Attaches insulation to the substrate

**DEKFAST™**

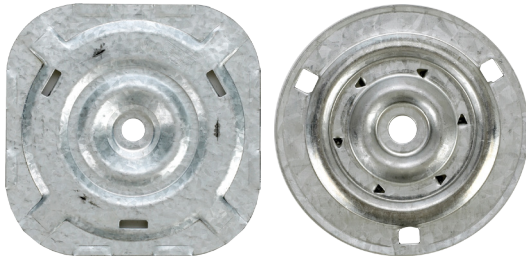


Iso Fast Plates	
Manufacturer	Dekfast
Styles	Round - Membrane
	Square - Insulation
	Oblong - Membrane
Material/Coating	Steel/Galvalume
Designed to be used with isofast fasteners and the IF160 or IF240 installation tools. See page 52 for more information on the IF160 and IF240.	

**Firestone**  
 BUILDING PRODUCTS  
 NOBODY COVERS YOU BETTER.®



TPO InvisiWeld Plate	
Manufacturer	Firestone
500 Pail	3" Round Plate
Steel Galvalume Plate with Special Coating	
InvisiWeld Plates are designed for use with the RhinoBond induction heat welding tool. See page 54 for more information on the RhinoBond induction heat welding tool.	

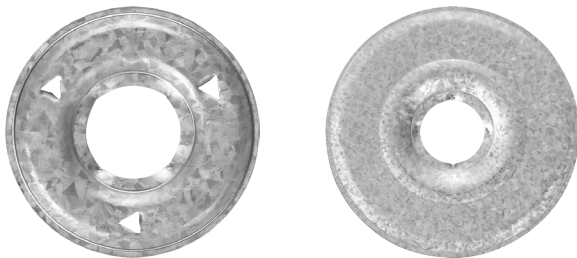

Polymer Auger Plates	
Sizes	2" seam, 3" insulation
Package	1000, 500
Material/Coating	Steel/Galvalume
Manufacturers	Firestone
	Dekfast
	OMG
	Trufast
Designed for use with polymer augers	

## Nails



Double Hot Dipped Galvanized Roofing Nail	
Manufacturer	Maze Nails
Lengths/Size	1 1/4", 1 1/2", 2" / 11 Gauge
Type	Straight Shank
Finish	Double Hot Dipped Galvanized
<p>Designed for the secure application of asphalt and fiberglass shingles on new construction and re-roofing jobs. STORMGUARD Double Hot-Dipped Zinc-Coating provides extra corrosion-resistance in sea coastal areas.</p>	



Electro Galvanized Roofing Nail	
Manufacturer	Grip Rite
Lengths/Size	1 1/4", 1 1/2", 2" / 11 Gauge
Type	Smooth Shank
Finish	Electro Galvanized
<p>For applying roofing asphalt shingles, insulation board, and felt to wood substrates. Large head and heavier shank gauge provide greater holding power. Electro Galvanized nail also appropriate for use with vinyl siding.</p>	




Stainless Steel Roofing Nail	
Lengths/Size	1 1/4", 1 1/2", 2" / 11 Gauge
Type	Smooth, Ring Shank
Finish	Electro Galvanized
<p>For applying roofing asphalt shingles, insulation board, and felt to wood substrates. Large head and heavier shank gauge provide greater holding power. Electro Galvanized nail also appropriate for use with vinyl siding.</p>	



Copper Roofing Nail	
Lengths/Size	1 1/4", 1 1/2", 2" / 11 Gauge
Type	Smooth, Ring Shank
Finish	Copper
<p>For applying roofing asphalt shingles, insulation board, and felt to wood substrates. Large head and heavier shank gauge provide greater holding power. Electro Galvanized nail also appropriate for use with vinyl siding.</p>	



Plastic Cap Nail	
Manufacturer	Grip Rite
Lengths/Size	1 1/4"
Packaged	2500pcs Bucket
Type	Ring Shank/Plastic Cap
<p>For anchoring house wrap, sheathing, and felt. Wide head and ringed shank for greater holding power.</p>	

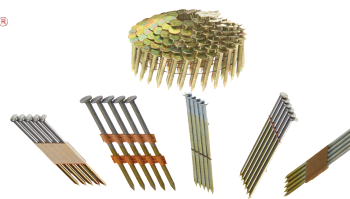

Grip Rite Nails	
Manufacturer	Grip Rite
<b>Framing</b>	
•Available from .113 - .148 thick, 2" 3 1/4" long	•28° wire weld
•Ring of smooth shank	•30° clipped or full head
•21" round head	
<b>Roofing</b>	
•Available from 3/4" - 1 3/4" long, ring or smooth shank	
•15° coil roofing nails	
<b>Coatings</b>	
•Electro Galvanized	•Hot dipped
•Stainless steel	•Bright coated
•PrimeGuard plus	





### Metal Cap Nail

Manufacturer	Grip Rite
Lengths/Size	1 1/4", 1 1/2"
Packaged	50lb Box
Type	Ring Shank/Metal Cap
For applying roofing asphalt shingles, insulation board, and felt-to-wood substrates. Large head and heavier shank gauge provide greater holding power.	



### Wire Coil Roofing Nail

Manufacturer	Grip Rite
Length	1 1/4"
Packaged	7200pcs Per Box
Type	Smooth Shank
Finish	ElectroGalvanized
Used with pneumatic nail guns. Works with Hitachi, Max, Senco, and Paslode nail guns	

ROOFING - NAILS



### Stinger Cap Staples


Manufacturer	National Nail
Length	3/8"
Packaged	7200pcs Per Box
Type	Smooth Shank
Finish	Coated Staple
Plastic cap staples for use with STINGER Cap Staple tools to secure roofing felt and house-wrap.	



### Stinger CH38 Cap Hammer


Manufacturer	National Nail
Fastener Capacity	168 caps/168 staples
Cap Type	Full 1" plastic collated
Fastener Type	3/8" crown staples
Fastener Length	3/8"
The CH38 is the first hammertacker to deliver a cap and staple. And it's easy to use – just pull the trigger and drive it in!	
The STINGER CH38 is designed for use with 3/8" STINGER StaplePac only	

## Penetrations



### ChemCurb System

Manufacturer	Chemlink
Sizes/Types	Round: 5", 7 1/2"
	Straight: 6", 12"
	Corners
The ChemCurb System is designed for use on granulated modified bitumen, PVC, PIB, TPO single ply, asphalt, and coal tar B.U.R. Please note TPO Primer must be used on TPO substrates.	



### E-Curb System

Manufacturer	Chemlink
Sizes/Types	Round: 3", 4", 6", 9"
	Straight: 3", 8"
	Corners: 2"
	Rectangles: 4.5"x3.4"
E-Curbs are designed for use on granulated modified bitumen, asphalt and coal tar B.U.R. (built up roofing). E-Curbs are specified for PVC, EPDM, PIB, and TPO single play roofing membranes. E-Curbs are highly versatile for sealing penetrations around solar panel mounts, HVAC, Electrical, and any type of structural supports. TPO Primer is required for use with TPO single-ply roof membrane.	

The ChemCurb/E-Curb System replaces the old style metal pitch pans with versatile precast components, pourable sealant, and structural adhesive/sealant. The system can usually be installed in under 15 minutes and eliminates the need for flashing or mechanical attachment.



### M-1 Structural Adhesive Sealant

Package	10.1 oz tube - 24 Tubes a Case
Manufacturer	Chemlink
Storage	cool dry area - will not freeze
Colors	White, Gray, Black, Limestone

#### Advantages:

- Solvent free, 100% solids will not shrink
- Non-slump, applies vertically and overhead
- 20 minute skin over
- No outgassing on damp services
- Good color stability, will not suntan
- Paintable within 24 hours
- Gun grade, no special tools or mixing required
- Application at temperatures as low as 32°F (0°C)
- Moisture cure
- Capable of joint movement in excess of 25%





### One Part Pourable Sealer

Manufacturer	Chemlink
Package	1-Quart Pouches - 2 Gallons per Case
	28oz Caulk Tubes - 12 Tubes per Case

1-Part is a moisture curing, pourable sealant designed for use in pitch pans and warranted ChemCurb/E-Curb penetration seals. 1-Part is suitable for application in damp, dry, or cold climates.

**Advantages:**

- Solvent free, 100% solids will not shrink
- 20 minute skin over
- No outgassing on damp services
- Good color stability, will not suntan
- Paintable within 24 hours (See limitations)
- Self leveling, no special tools or mixing required
- Application at temperatures as low as 32°F (0°C)
- Available in Black, White, and Gray



### Hurricane Force Universal Sealer

Manufacturer	Royal
Packaged	4 Cartridges a Case

Hurricane Force Universal Sealer is a fast setting, solvent free, multi-use universal sealer that becomes waterproof within minutes of application.

**Uses:**

- Filling penetration pockets and Lockin' Pockets
- Repairing splits, cracks, holes, and other membrane defects
- Side and head laps on modified bitumen membranes
- Temporary roof tie-ins and night seals
- Shingle repairs



### Lockin' Pocket Interlocking Pitch Pocket System

Manufacturer	Royal
Sizes/Types	Square: 4", 6", 8"
	Straight: 6", 10", 12"
	Inside/Outside Corner

Lockin' Pocket Interlocking Pitch Pocket System is a pre-fabricated interlocking pitch pocket system that is easily assembled on site and filled with pourable sealer.



### LPS

Manufacturer	Royal
Packaged	12 Cartridges a Case

LPS is a single component elastomeric sealant without isocyanates. It cures rapidly under the effect of atmospheric humidity to form a flexible and resistant joint with very good adhesion on most materials. Weather-Tite LPS is a multi-use sealer that can be used for:

- Adhering Weather-Tite Lockin' Pockets to approved substrates
- Repairing splits, cracks, holes and other membrane defects
- Mid level construction grade adhesive
- Temporary roof tie-ins and night seals



### Make-A-Clamp Kit

Manufacturer	Breeze
Packaged	50' Band 10 Adjustable Fastener
<p>100% Stainless Steel Good for 2" diameter and up!</p>	



### Pipe Supports

Manufacturer	OMG
<ul style="list-style-type: none"> <li>•EPDM Mini 1/2" - 1 1/2" pipe supported 1 1/2" off surface</li> <li>•EPDM Small 3/4" - 2" pipe supported 3 1/2" off surface</li> <li>•EPDM Large 2 1/2" - 5" pipe supported 3 1/2" off surface</li> <li>•EPDM Tall Small 3/4" - 2" pipe supported 6" off surface</li> <li>•EPDM Height Adjustable 1/2" - 4" pipe supported 6" - 8 1/2" off surface with stainless steel supported channel</li> </ul>	
<p>All pipe supports have a unique, one-piece, triangular design that is engineered to shed water while its wide platform base provides stability and balance</p>	



### Quad Flash

Manufacturer	OMG
<p>The Quad Flash boot provides a fast and efficient method for sealing clusters of rooftop pipe penetrations. It's permanent, watertight, and maintenance free.</p> <p><b>Features and Benefits</b></p> <ul style="list-style-type: none"> <li>•Extra wide, 14" base flange for easy installation</li> <li>•Dual Lok &amp; Grip ridges hold molded EPDM cap.</li> <li>•Rubber caps outperform pitch pockets by handling vibration and pipe movement without cracking.</li> <li>•Can be used to flash single pipes or clusters of up to four</li> <li>•Easy to install and maintenance free</li> </ul>	



### EPDM Pipe Boot with Adhesive Tape

Manufacturer	Portals Plus
Sizes	1-3", 1-6"
<ul style="list-style-type: none"> <li>•For pipes 3" or less and 6" or less in diameter</li> <li>•60 mil EPDM or HYPALON compression molded body</li> <li>•Snaplock Clamp</li> </ul>	

## Termination



Flat Termination Bar	
Material	Aluminum
Packaged	50pcs per Tube
Length	10ft
Holes	6" or 12"
Available in .090" and .125" thick	



Double Lipped Termination Bar	
Material	Aluminum
Packaged	50pcs per Tube
Length	10ft
Holes	6", 8", 12" o.c.



Single Lipped Termination Bar	
Material	Aluminum
Packaged	50pcs per Tube
Length	10ft
Holes	6" or 12" o.c.
Available in .075" and .1" thick	



Stainless Steel Termination Bar	
Material	304 Stainless Steel
Packaged	20pcs per Tube
Length	10ft
Holes	6" o.c.
Available in .075" thick lipped and .125" thick flat	



Drive Pin Type Anchor	
Diameter/ Length	3/16" x 7/8" 1/4" x 1" up to 3"
Head	Mushroom Head, Flat Head
Material	Zamac Alloy with Carbon or Stainless Steel Drive Pin

## Tapes and Primers



### EPDM Cured Cover Strip

Manufacturer	Royal
Packaged	2 Rolls a Case (5", 6", 9") 1 Roll a Case (12")
Sizes	5", 6", 9", 12"

Millennium EPDM Cover Strip consists of a semi-cured EPDM membrane that has been laminated to a 25 mil EPDM based pressure sensitive tape adhesive. Millennium EPDM Cover Strips are designed to cover, protect, and seal mechanical fastening bars, membrane fasteners, core sample repair patches, membrane repairs, and seam overlays in all EPDM roofing systems.



### EPDM Uncured Flashing

Manufacturer	Royal
Packaged	1 or 2 Rolls a Case
Sizes	5", 6", 9", 12"

Millennium EPDM Flashing Tapes consist of an uncured EPDM membrane that has been laminated to a 25 mil EPDM based pressure sensitive tape adhesive. The flashing tape is extremely flexible and can be formed to fit irregular shapes and surfaces. Millennium EPDM Flashing Tapes are ideal for flashing rooftop penetrations and other details such as:

- Overlay at T-joints, corners, pipes, and penetrations
- General repair in non-traffic areas
- Gravel stop flashing
- General purpose flashing
- Metal edge tie-in



### EPDM Seam Tape

Manufacturer	Royal
Packaged	4 Rolls a Case
Size	3", 7"

Millennium EPDM Seam Tape is an extruded, vulcanized, black pressure sensitive rubber adhesive tape designed to provide high strength, watertight seams for single ply EPDM roofing membranes. Millennium EPDM Seam Tape is soft and tacky providing a quick grab onto EPDM field membranes, yet possesses high initial strength. Millennium EPDM Seam Tape also exhibits excellent adhesion to polar and non-polar substrates such as glass, metals, wood, concrete, masonry, and some plastics.



### Reinforced Perimeter Strip

Manufacturer	Royal
Packaged	2 Rolls a Case
Size	6"

Millennium Reinforced Perimeter Strip consists of reinforced EPDM membrane strip laminated with a 35 mil EPDM based pressure sensitive tape adhesive. The reinforced EPDM membrane is 6" (15.24cm) wide mated to a 3" (7.62cm) wide pressure sensitive tape adhesive. Millennium Reinforced Perimeter Strip is designed for non-penetrating securement of the EPDM membrane in ballasted, fully adhered, and mechanically fastened roof systems.



### TPO Cover Strip

Manufacturer	Royal
Packaged	2 Rolls a Case
Size	6"
<p>TPO Cover Tape consists of a white cured tape adhesive that is laminated to a white thermo-plastic cover strip. TPO Cover Tape may be used to cover Bar Anchors or strips in metal flanges.</p>	



### TPO Seam Tape

Manufacturer	Royal
Packaged	4 Rolls a Case
Size	3"
<p>TPO White 3" Seam Tape is a Butyl white tape adhesive designed to provide a high strength, watertight seam in TPO roofing membranes. TPO Seam Tape is soft and tacky for quick grab to TPO. The 3" tape is available in 100' lengths and comes pre-applied to silicone treated release liner.</p>	



### EPDM Edge Sealant

Manufacturer	Royal
Packaged	12 Tubes a Case
Size	10.3oz
<p>Millennium EPDM Edge Sealant is a specially formulated high solids, low VOC, EPDM based sealant designed to seal the exposed edges of EPDM membrane splices. The sealant has excellent adhesion to EPDM membranes. Millennium EPDM Edge Sealant is designed to seal the exposed edges of EPDM membrane roof splices, T-Joints, step downs, tie-ins, termination bars, and general flashing details.</p>	



### EPDM TPO Primer

Manufacturer	Royal
Packaged	6- 1gal Cans a Case 1- 3gal Bucket
<p>Millennium Single-Ply Primer is a translucent polymer based roofing primer. Unlike thin primers that run and puddle the high viscosity formulation promotes uniform coverage on both horizontal and vertical surfaces. Millennium Single-Ply Primer does not react with atmospheric moisture allowing it to be opened and resealed for use at a later date. Millennium Single-Ply Primer is used to prime EPDM and TPO roofing membrane to provide improved adhesion. Millennium Single-Ply Primer is an excellent choice for priming concrete, OSB, plywood, and metal surfaces.</p>	






### TPO Edge Sealant

Manufacturer	Royal
Packaged	12 Tubes a Case
Size	10.3oz
<p>Millennium TPO Edge Sealant is a specially formulated high solids, low VOC, EPDM based sealant designed to seal the exposed edges of TPO membrane systems. The sealant has excellent adhesion to TPO membranes.</p>	




### Water Block Mastic

Manufacturer	Royal
Packaged	30 Tubes a Case
Size	10.3oz
<p>Millennium Water Block Mastic is a gray colored, high performance, low VOC, non-curing, permanently flexible gun grade mastic. It maintains a positive seal by remaining flexible and adhered to all approved substrates. Millennium Water Block Mastic is a non-curing, non-skinning secondary sealant designed for unexposed waterproofing applications. Millennium Water Block Mastic can be used:</p> <ul style="list-style-type: none"> <li>•Behind termination bar</li> <li>•Under roof drains</li> <li>•Acoustical sealant</li> <li>•Roof panel rib sealant</li> <li>•Vapor barrier sealant</li> </ul>	



### RoofSeal

Manufacturer	Eternabond
Size	4", 6", 8", 12" x 50'
Colors	White, Black, Gray, Tan
<p>For use on virtually all roofs, RoofSeal tape incorporates Eternabond's advanced micro-sealant technology and features a super flexible UV stable backing. Roof Seal is a one step (with the exception of cleaning the surface) permanent repair system for all roofs. RoofSeal creates a waterproof, moisture and air tight barrier.</p> <p><b>Bonds to:</b> EPDM, TPO, most PVC, CSPE/Hypalon, CPE, SBS, APP modifieds, asphalt BURs, coal tar BURs, all metal roofs, tiles, shingle, aluminum, galvanized steel, gypsum board, wood, polyethylene, propylene, polystyrene, fiberglass, brick, concrete, masonry, OSB, etc.</p>	



### RoofSeal Plus

Manufacturer	Eternabond
Size	4", 6" x 25'
Color	Black, White
<p>Designed specifically for surfaces that require a deeper seal. RoofSeal Plus features a UV stable backing. It features EternaBond's advanced MicroSealant Technology. RoofSeal Plus creates a water proof, moisture and air tight barrier. RoofSeal Plus remains flexible to temperatures as low as -70°F. Same as RoofSeal, but a full 65 mil thick.</p>	




## ETERNABOND



WebSeal	
Manufacturer	Eternabond
Size	4", 6", 8", 12" x 50'
<p>For use on virtually all roofs, Web Seal is designed to hold coatings, whether water or solvent based. WebSeal makes the roof water-tight prior to application of coating, creating a superior, faster method of waterproofing over conventional 3 course applications, eliminating dependence on the roof coating as a water barrier.</p>	

## ETERNABOND

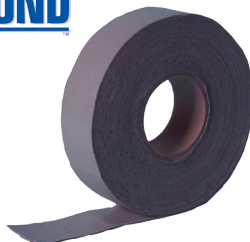

DoubleStick Microsealant Putty Tape	
Manufacturer	Eternabond
Size	4", 6" x 50'
<p>DoubleStick tape is a seal-sealing adhesive creating a water-tight, conformable seal between two or more irregular surfaces, and/or creates a weather proof, permanent bond between two or more similar or dissimilar surfaces. Use as a lap seal, under the foot of an equipment curb or skylight, or roll it into a bread or ball of Microsealant to form a gasket, seal a gap or seal, or as needed.</p>	

## ETERNABOND



EternaPrime	
Manufacturer	Eternabond
Size	1 quart, 1 gallon, 14oz Aerosol
<p>EternaPrime is a specially formulated primer developed specifically for EternaBond tapes. EternaPrime, based on a VOC exempt solvent, meets all federal standards for health and environmental safety.</p> <p><b>Recommended uses include:</b>                      Dirty surfaces which are difficult to clean completely (tar and gravel), potentially loose surfaces (mortar), porous surfaces (wood or concrete), and anytime the EternaBond tape is applied at temperatures below 40°F ambient.</p>	

## ETERNABOND



EternaClean	
Manufacturer	Eternabond
Size	14oz Aerosol
<p>EternaClean Spray Cleaner is formulated with a proprietary mixture of hot solvents, designed to "open" single-ply roof membranes and metals. Allows the surface to release contaminants like oxidation, grime, oil and grease, tree sap, etc. EternaClean Spray Cleaner leaves no residue, dries fast, and is non chlorinating so it is environmentally friendly and therefore legal in all states. EternaClean Spray Cleaner prepares surfaces for the application of EternaBond Microsealant tapes as well as other sealants.</p>	

**Firestone**  
 BUILDING PRODUCTS  
 NOBODY COVERS YOU BETTER.®



**Quickprime LVOC**

<b>Manufacturer</b>	<b>Firestone</b>
<b>Size</b>	<b>1 Gal</b>
<p>Single-ply LVOC primer is a solvent based primer designed to clean and prime EPDM and TPO membranes to be welded, or receive primers, adhesives, and sealants. Membrane cleaned with Seam Cleaner LVOC to receive seam tape shall be further prepared by th application of the appropriate primer.</p>	

**Firestone**  
 BUILDING PRODUCTS  
 NOBODY COVERS YOU BETTER.®



**Splice Wash**

<b>Manufacturer</b>	<b>Firestone</b>
<b>Size</b>	<b>3 Gal</b>
<p>Firestone Seam Cleaner LVOC is designed to clean and prepare dirty EPDM and TPO membranes to be welded or receive primers, adhesives and sealants. Membrane cleaned with Seam Cleaner LVOC to receive seam tape shall be further prepared by the application of the appropriate primer.</p>	