

PROFAST

HARRISBURG | PITTSBURGH | PHILADELPHIA | BALTIMORE

NEW!



FALLTECH FT IRON 3D®



SAFETY EQUIPMENT



PROFASTINC.COM | 1.800.243.3418



3 Arrest/2 Restraint

COBRA CART™

If multiple workers on a jobsite require Personal Fall Arrest systems, the Cobra Cart™ Multi-Man is the solution. Cobra Cart™ offers workers OSHA compliant anchor points when doing leading-edge work.



1 Arrest/1 Restraint

LIFEPOINT™ DELUXE NON-PENETRATING

The LifePoint Deluxe is a mobile safety harness tie-off device that provides fall protection for two people: Fall Arrest for one and Fall Restraint for one, or Fall Restraint for two.



1 Arrest/1 Restraint

LIFEPOINT™ STANDARD

The LifePoint Standard is the perfect solution for fall protection when circumstances require non-penetrating versatility. 1 arrest, 1 restraint.



3 Arrest/2 Restraint

PENETRATOR X3

The Penetrator X3 mobile fall protection system offers unparalleled portability while being the lightest system on the market at 425 lbs. The X3 lifts into place allowing the users to quickly snap in and get to work. When the work moves, the X3 by Tie Down and quickly be relocated.



5 Arrest/2 Restraint

PX5 SENTINEL

Fully portable mobile fall protection device with ample storage that offers 3 Fall Arrest and 2 Fall Restraint tie-downs. When you need a mobile fall protection device that can function on almost any surface, the new Penetrator Sentinel is the ultimate choice.



5 Arrest/2 Restraint

PENETRATOR X5

The revolutionary Penetrator X5 ships are ready to use and safely protect up to seven workers at a time. Weighing less than 600 lbs., the X5 provides fall arrest safety for five workers and an additional two workers in restraint, all at the same time. When it's time to relocate, our premium non-flat tires allow for quick relocation so our customers can resume their work without sacrificing productivity.

PERMANENT WEIGHTED ANCHORS

ANGEL ANCHOR SYSTEM

A versatile single tie-off point when penetrating the substrate is not an option. A modular design makes it easy to transport and assemble and allows for the anchor to be used on surfaces up to a 5° slope.



16 PLATE HIPPO ANCHOR

The Hippo Anchor by Tie Down Safety is a deadweight anchor system that sits on the top of a roof without penetration. The heavy anchor weight design makes this an ideal fall arrest or restraint system.

GARLOCK SAFETY SYSTEMS

FIT-RITE™ SAFETY RAIL

Custom perimeter safety rail just got easier with RailGuard™ Fit-Rite™ railing systems. The latest in passive fall protection from Garlock offers complete customization to fit any rooftop, mezzanine or loading dock. Fit-Rite Can be used in flat roofing, Metal Roofs and interior plant.

Design and CAD Drawings Available

- Available in Galvanized or painted
- Straight or Curved Stanchions
- Multiple connection fittings
- Self-closing gates
- 10' or 21' lengths
- Non-Penetrating Safety Guardrail System
- Meets OSHA Requirements
- 1910.29(b) and 1926.502(b)



GARLOCK SAFETY SYSTEMS

RAILGUARD 200™ SAFETY GUARDRAIL

RailGuard 200 Exceeds OSHA requirements for temporary and permanent guardrail applications. With its Non-penetrating design, it allows for the protection of the worker with out compromising the waterproof integrity of the roof system.

Available in both Standard sizes and custom size
Options Include: Base transporter, Galvanized or Painted base and Rails, Toeboards, Gates
To Find available colors go to www.ralcolor.com

Design and CAD Drawings Available

- Non-Penetrating Safety Guardrail System
- Meets OSHA Requirements
- 1910.29(b) and 1926.502(b)



GARLOCK SAFETY SYSTEMS

SET AND PREVENT™ RAILGUARD 200™ BASE


- Non-penetrating design maintains the watertight integrity of the roof.
- Accepts an inexpensive form-fitting rubber pad for delicate roofs.
- Heavy-duty steel insert with galvanized plating for long term durability and value.
- Dual 3/8" lifting handles for ease of use.
- Compatible with our current base transporter for
- Dual post design for straight runs, square corners, and diagonal corners. easy moving and positioning.
- Internally reinforced with rebar for long term durability.



GARLOCK SAFETY SYSTEMS

STANDARD GUARDRAIL BASE

- Standard padded base for use with Garlock RailGuard 200 system
- OSHA 1926.502(f)(2) compliant
- Available in powder-coated yellow and galvanized

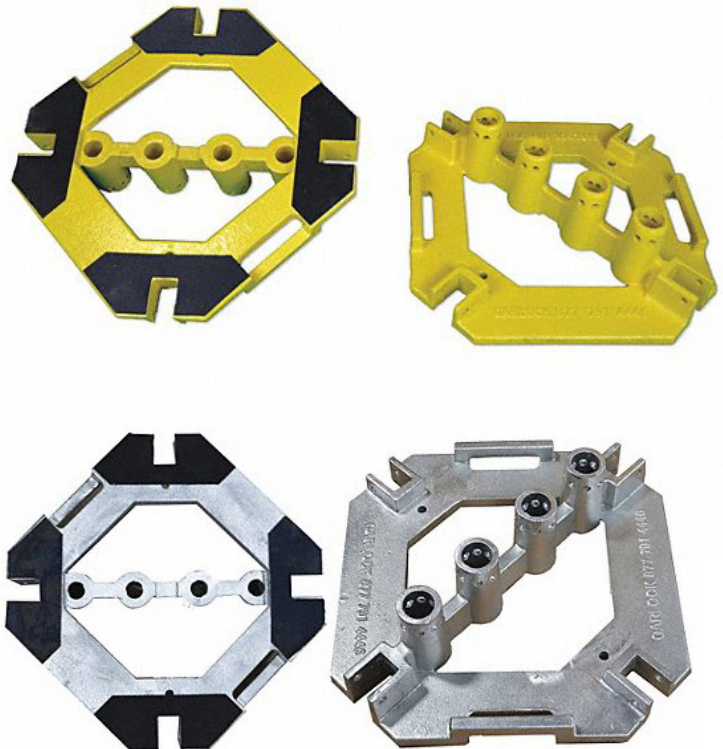

SAFETY GATES



ADJUSTABLE SELF CLOSING GATES


OSHA Compliant gates that protect workers from falls, or limit access to hazardous areas.

Fits Openings: 17"-48" Wide
Universal Mount System, mounts to 1" or 2" round or square posts, wall mounts
Options: Galvanized or Safety Yellow



FREESTANDING SWING GATES

Swing gates from 4' to 12' wide used in conjunction with RailGuard 200™ systems. Meets all OSHA standards. Available in powder coat or galvanized finished.



SENTRYGUARD™ GATES

Fall prevention gate to protect open loading docks, stairwells, shipping pits, limiting access, and more. Easy operation and OSHA compliant.

HATCH/LADDER PROTECTION



HATCHPROTECTOR™

The HatchProtector™ mounts directly to the roof hatch with a compression fit design, offering a quick and reliable roof hatch guard system.



LADDERGUARD™

Fastest, easiest, and most affordable way to create a safety egress and ingress zone to guard rooftop ladder access starting 6 ft. from leading edge.



ROOF HATCH SAFETY RAILING

Babcock-Davis' OSHA compliant Safety Railing is ideal for new and retrofit applications. The safety railing mounts to the existing roof hatch curb counterflash without penetrating the membrane.



LADDER SAFETY POST

The Safety Post is designed in compliance to OSHA to extend 42 inches above a landing platform to provide safe ladder access through a roof hatch or floor door. The spring assisted telescoping design mounts to the top two rungs of a fixed vertical ladder.



SAFE-T™ LADDER EXTENSION SYSTEM


Designed to attach over the top of the ladder and provide a safe and easy transition from the ladder to a second surface.



SAFE-T™ SELF CLOSING LADDER GATE

The Safe-T Ladder Gate, designed for use in combination with the Safe-T Ladder Extension, is perfect for providing additional protection when climbing off or onto a ladder.

EDGE PROTECTION

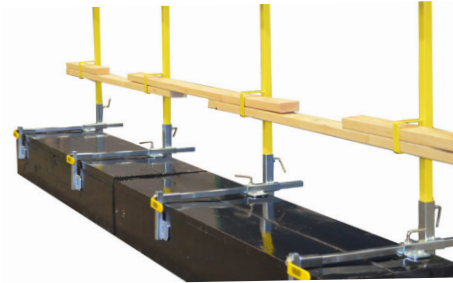

PERIMETER CLAMP SYSTEM

OSHA compliant leading edge fall protection system that can be used on both flat edge surfaces and parapet walls. (2x4s not included).



SLABGRABBER™ PERIMETER CLAMP

The SlabGrabber Guardrail Clamp is the latest from Garlock Safety Systems for Perimeter Fall Protection. Can grab a concrete slab with a thickness range of 2" to 24"



TURBORAIL™

The premier leading edge rail protection system with heavy-duty steel clamps, stanchions and snap on horizontal rails, offers a warning line system that provides perimeter fall protection for all industrial workspaces.

WARNING LINES



EVERLAST™ 300 WARNING LINES

A permanent warning system with heavy-duty RailGuard™ 200 metal bases, plastic-coated cable, and metal pennants.



PERMANENT WARNING LINE

The aluminum warning pendants contain the word "DANGER". This warning line system provides a permanent but simple solution for unprotected edges for irregular work in a facility or rooftop.



PERIMETER DEFENDER CONE

OSHA Compliant Cone and Base is the perfect solution for the temporary deployment of warning line system during roofing or construction projects.



OSHA PERIMETER MARKER FLAGS

Yellow or Red Color, 105' Long, OSHA compliant



RED DANGER DO NOT ENTER / YELLOW CAUTION TAPE


Tape 3" x 1000Feet, Tear Resistant Design

PERMANENT



SKYGUARD™ PROTECTION SYSTEM

Modular OSHA compliant fall protection skylight system that works best for large and tall skylights and smoke hatches.



SCREENGUARD™ SKYLIGHT COVERS

ScreenGuard™ skylight covers provide a cost-effective, OSHA compliant fall protection solution that secures to the skylight frame with compression fit - no penetrating fasteners, adhesive or straps. Galvanized screen resists corrosion.

TEMPORARY




PORTABLE SKYLIGHT NET

Portable Skylight Nets are made of high tenacity 4" polypropylene knot-less nets and are used during new construction, renovation, and maintenance roof work as a form of personal fall protection where skylights are present.

MOBILE SKYLIGHT PROTECTION SYSTEM

MOBI Skylight Netting is a multi-functional, durable, and easy to set-up piece of fall protection equipment. Once it is installed over a skylight, it functions as a fall prevention system, protecting workers in the event of a fall onto a skylight.



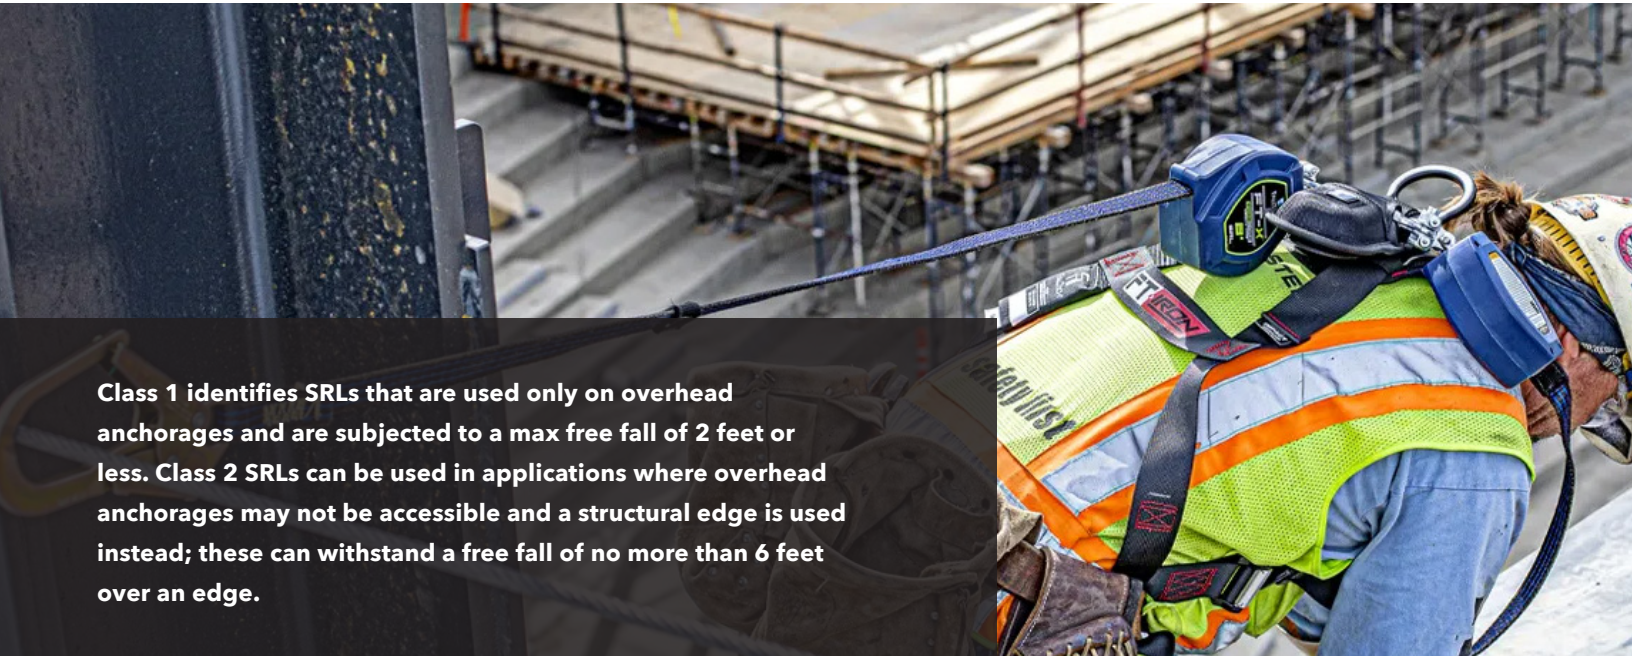

Class 1 identifies SRLs that are used only on overhead anchorages and are subjected to a max free fall of 2 feet or less. Class 2 SRLs can be used in applications where overhead anchorages may not be accessible and a structural edge is used instead; these can withstand a free fall of no more than 6 feet over an edge.

RETRACTABLES



FALLTECH®

CONTRACTOR CLASS 2 SRL

New Class 2 Leading Edge SRL engineered for those who require the optimal balance of compliance, safety, and worker efficiency when working at height.

Sizes: 20', 30', 60'



FALLTECH®
DURATECH®

MINI PERSONAL SRL

May be anchored up to 5' below the dorsal D-ring for user's weighing up to 310 lb max.

Sizes: 6' 9' 30' 50'



FALLTECH®

CONTRACTOR SRL

30' galvanized cable and anchorage carabiner. 3/16" galvanized steel cable lifeline with load-indicating swivel snap hook.

Sizes: 20', 30', 50', 100'



FALLTECH®

CONTRACTOR LEADING EDGE SRL

7/32" galvanized steel cable lifeline with load-indicating swivel snap hook. Internal inertial braking system provides positive stopping action and uniform deceleration.

Sizes: 30', 50'



SAFEWAZE

NORTHSTAR CLASSIC SRL

Self Retracting Lifelines with specialized impact resistant housing and non-corrosive components. Also features an enhanced swivel top load indicating snap hook and fast-acting braking system.

Sizes: 20', 30', 50', 65'

HARNESSES

NEW ARRIVAL!

FALLTECH®



FT IRON 3D®

- New ergonomic lateral leg straps and construction greatly improve comfort and mobility.
- Rugged waist belt supports extreme loads of tools or equipment without folding while distributing load evenly for improved comfort
- Reinforced sub-pelvic strap features durable wear pad for extended product service life
- New ArrowGrip dorsal D-ring plate minimizes slippage for comfort and minimal adjustment
- Features integral tri-layer padded shoulder yoke to provide breathable user comfort
- Updated SRL connection point for fast, hassle-free attachment of all types of single and twin SRLs
- Quick-connect chest buckle features visual indicator showing positive connection
- Tongue buckle legs are equipped with 9 grommeted adjustment positions for a wider range of fit
- Fully adjustable suspension trauma relief system
- Complies with ANSI Z359.11-2014



FALLTECH®

CONTRACTOR 1D STANDARD NON-BELTED FULL BODY HARNESS

- Dorsal attachment sleeve supports effortless addition of personal SRLs
- Plated alloy steel low-profile spring tension roller torso adjusters.
- Breathable padded air-mesh shoulder yoke delivers added user comfort
- Paired lanyard parking keepers Plated alloy steel dorsal, sternal D-rings with mating buckle chest and tongue buckle leg closures
- Outfitted with 9 grommeted leg adjustment positions for a wider range of fit
- Complies with ANSI Z359.11-2014



NEW ARRIVAL!



SAFEWAZE

PRO FULL BODY HARNESS: 1D, MB CHEST, FD, TB LEGS

- Dorsal D-ring
- Friction buckle torso adjusters
- Mating buckle chest
- Front D-ring
- Tongue buckle legs
- Shoulder pad

ROPE & LANYARDS



8259

6' Internal Energy Absorbing Lanyard, Single-leg with Steel Snap Hooks.



8259Y3

6' Internal Energy Absorbing Lanyard, Double-leg with Steel Connectors.



8256

6' ViewPack® Energy Absorbing Lanyard, Single-leg with Steel Snap Hooks.



8256LT

6' Soft Pack FT Basic® Energy Absorbing Lanyard, Single-leg with Steel Snap Hooks.



8256LT3

6' Soft Pack FT Basic® Energy Absorbing Lanyard, Single-leg with Steel Connectors.

HORIZONTAL LINES



100' 4-PERSON TEMP ROPE HLL SYSTEM

High-strength, durable 5/8" double braid polyester rope lifeline with steel thimble and stitched end-termination.



60' TEMPORARY ROPE HLL SYSTEM; 2-PERSON WITH KERNMANTLE ROPE

Features 11/16" solid-core nylon kernmantle rope with one sewn and thimble end-termination



DORSAL D-RING EXTENDER WITH STEEL SNAP HOOK

- Provides improved over-the-shoulder reach for ease of connecting lanyards and SRLs
- Built with rugged polyester webbing and alloy steel D-ring.
- Includes alloy steel snap hook for harness attachment
- Extender use will increase the user's total fall clearance distance when using an energy absorbing lanyard
- Complies with ANSI Z359.11-2014



6' LEADING EDGE CABLE ENERGY ABSORBING LANYARD

- Combined user protection for leading edge applications features 1/4" cable and dual-class energy absorber
- Hard-wearing steel cable resists cuts over sharp and abrasive leading edge hazards.
- Dual-class energy absorber rated for 12' foot-level
- 6' overhead free fall applications for users weighing up to 310 lb
- Energy absorber features patented ViewPack® cover with inspection window
- ViewPack® cover also features WrapPack label protection
- Includes alloy steel snap hooks for harness attachment and anchorage connection
- Complies with ANSI Z359.13-2013

FALLTECH®

CONCRETE



7451A
 Rotating D-ring Anchor with
 Concrete Screw



7440
 Expansion Wedge Anchor for
 Concrete, 5,000 lb

STEEL



8256
 Bolt-on D-ring Anchor with
 Installation Plate



8256LT
 14 1/2" Trailing Beam Anchor
 with Dual-clamp Adjustment

ROOFING



7444
 Single-use Wood Roof Ridge
 Anchor



7410
 Hinged Reusable Wood Roof
 Anchor



7410M
 Hinged Reusable Anchor for
 Steel Deck and Metal Roofing



7493A
 Reusable Heavy Duty Chain
 Anchor for Wood


FALLTECH®



PITCH PRO
 The PitchPro is a premier fall
 protection anchor designed
 for sloped-roof asphalt shingle
 construction.



**STANDING SEAM
 ROOF ANCHOR**
 The Standing Seam Roof
 Anchor is a compact non-
 penetrating roof anchor
 designed for use on sloped or
 flat standing seam roofs.



**ADJUSTABLE PARAPET
 WALL ANCHOR**
 No tools required with simple clamp-
 on non-penetrating installation.
 Adjusts to fit parapets from 1/2" to 15"
 thick and having a minimum height
 of 9"



PASS-THROUGH CHOKER ANCHOR
 Features 1-3/4" load-bearing web
 with 3" wide full-length wear pad for
 abrasion resistance. Appropriately
 sized alloy steel D-rings provide
 simple pass-through choke-on
 installation. Sizes: 3',6',8',10',12'

PERMANENT

TIE DOWN MANUFACTURING INGENUITY



COMMERCIAL ROOF ANCHOR-12
 Commercial Roof Anchor Series are perhaps
 the most proven fall protection anchors
 on the market. Commercial Roof Anchors
 are compatible for installation onto wood,
 steel, and concrete substrates (fasteners are
 included for wood and steel applications).



TIE DOWN MANUFACTURING INGENUITY

**COMMERCIAL ROOF ANCHOR-18
 (WOOD AND METAL DECK)**
 Commercial Roof Anchor Series are perhaps
 the most proven fall protection anchors on
 the market. Commercial Roof Anchors are
 compatible for installation onto wood and
 steel (fasteners are included).



SUPERPLASMA HD SAFETY HELMET



ZENITH X2 SAFETY HELMET



ZENITH X2 AIR



WHY SWITCH TO A SAFETY HELMET FROM A HARD HAT?

- Hard hats only protect you from falling objects - not falls.
- Hard hats will fall off your head before you make impact after a fall - a safety helmet will stay on!
- Hard hats do not have optional electrical protection.
- Safety helmets provide protection for the top, sides, and back of the head.
- General Contractors and Building Owners are making safety

ZEN VISOR



VISOR V2 PLUS



ZEN FULL FACE VISOR



HEARING PROTECTION- SC1



FALLTECH®

8595A

Roofer's Kit with Hinged Reusable Anchor and Manual Rope Adjuster

Features:

- Single D-ring Contractor harness for fall arrest
- Harness features mating buckle legs and chest
- Includes 3' Soft Pack energy absorbing lanyard with integrated manual rope adjuster
- 50' construction-grade vertical lifeline includes plated alloy steel snap hook, steel thimble, and back-spliced end
- Roofer's Kit contains: 7015 Harness, 7410 Anchor, 8149 Lifeline, and 8353LT Lanyard
- (See component part # for standards and regulations compliance)



SAFETY GLASSES



Grey



Clear

IPROTECT® SAFETY GLASSES

IPROTECT. 9.5 base curve offers great wrap around protection. No hard coating on lens. Polycarbonate lens offers 99% UV protection.



Clear

SPLASH GOGGLES

Splash protection goggle with polycarbonate lens. Uncoated lens. Vinyl frame with four indirect vents. Black strap masks grease and grime.



OCTANE® SAFETY GLASSES

One piece 8.5 base curve. Rubber inserts in temple offer extra hold. Hard coated lens offers 99% UV protection and scratch resistance. Includes lanyard. Colors: Camouflage, Black, and Red



VESTS



BREAK-AWAY SAFETY VEST

ANSI 107 Type R, Class 2 5 Point Break-Away vest. 100% polyester mesh. Hook & loop front closure. 2 interior waist pockets. AwareLite reflective trim. Sizes: MD - 3X.



SURVEYOR'S SAFETY VEST

ANSI 107 Type R, Class 2 Surveyor vest. Solid front, mesh back. Zipper front. 1 split pad/pencil pocket, 1 radio pocket, 2 ext. waist pockets w/hook & loop closure, 2 open int. waist pockets, 1 int. flashlight pocket. Mic tabs. Sizes: MD - 3X.



REFLECTIVE SAFETY VEST

Adjustable hook and loop front closure. Elastic side straps. 1" reflective stripes on front and back. Does NOT Meet the requirements of ANSI/ISEA 107. Sizes: One size fits most.

HARD HATS



OMEGA II® CAP - RATCHET STYLE

Molded from high density polyethylene for maximum protection. Secure-Fit ratchet features an easy turn knob. Adjusts to over 40 different head sizes, 6.5 - 8 Made in USA and meets ANSI Z89.1 Type 1, Class C, E & G requirements



OMEGA II® FULL BRIM - RATCHET STYLE

Molded from high density polyethylene. Provides protection from sun and rain. Secure-Fit ratchet features an easy turn knob. Adjusts to head sizes, 6.5 - 8. Made in USA. Meets ANSI Z89.1 Type I, Class C, E & G requirements.



ANTI-FOG TOWELETTES

Ideal for safety goggles, eyewear, welding hoods, etc. Reduces dust and finger prints. Does not contain acid, ammonia or abrasives. Wall mount or desk top. 7.25" x 5"

FIRST AID KITS



FIRST AID KIT WITH METAL BOX

Available in 10 & 25 person. ANSI Premium first aid kit. Meets ANSI Z308.1-2009.



FIRST AID KIT WITH PLASTIC BOX

Available in 10 & 25 person. ANSI first aid kit. Meets ANSI Z308.1-2009.

COVERALL



POSI-WEAR® BA™

PosiWear BA Coverall,
Elastic Wrist & Ankle

SHEILDS



PLASTIC VISOR CARRIER

Fits into helmet accessory slots. For use with all ERB shields except model #8170. Carrier has adjustable tension for raising shield when not in use. Fits Omega II, Americana and Liberty.

**Carrier Only. Hat sold separately*



CLEAR PC SHIELD .040

Clear polycarbonate shield. Size 7.75" x 15.5" .040 thick. Visor Carrier/Shield Compatibility: Fits E13, E14, E15, E16, E16R, E17, E18, E19, E20, and E21 carriers.



ALUMINUM BRACKET FOR OMEGA II®

Fits ERB Omega II helmet style. Deluxe aluminum construction. Adjustable tension. Shield, helmet and carrier sold separately. Meets ANSI Z87.1-High Impact when paired with 8150 shield.

**Bracket Only. Hat sold separately*

HEARING



FOAM CORDED EAR PLUG

Non-allergenic corded foam ear plugs provide long term comfort. Convenient packaging for on-site distribution Each pair of plugs is individually wrapped.



FOAM UNCORDED EAR PLUG

Non-allergenic uncorded foam ear plugs provide long term comfort. Convenient packaging for on-site distribution Each pair of plugs is individually wrapped.



EAR MUFF NRR 20DB

Lightweight hearing protector. Economical choice for hearing protection. Soft vinyl ear cushions. Individually adjustable ear cups.

GLOVES



BROWN JERSEY (NO LINING)

Blend of approx. 70% cotton and 30% polyester. 1.6 oz., cleft cut with knit wrist.



LEATHER PALM WORK GLOVES

Unisex size large leather palm glove.



13 GAUGE NYLON KNIT SANDY FINISH

13 gauge gray nylon with spandex liner.



PROTECTIVE INDUSTRIAL PRODUCTS



POSISHIELD™ 5MIL

Disposable Nitrile Glove, Powder Free with Textured Grip



POSISHIELD™ 7MIL

Disposable Nitrile Glove, Powder Free with Textured Grip



PIP®

Regular Weight Polyester/Cotton Jersey Glove with Fleece Lining - Red Knit Wrist



WEST CHESTER®

PVC Dipped Glove with Interlock Liner and Rough Finish - 12"



BOSS®

Seamless Knit Cotton/Polyester Glove with Textured Latex Grip - Medium Weight



BARRACUDA®

Seamless Knit HPPE Blended Glove with Polyurethane Coated Flat Grip on Palm & Fingers

NEW HIRE KIT



The ProFast New Hire Kit is a great way to get summer help and new hires the P.P.E they need without having to inventory individual SKU's of P.P.E. All of these P.P.E Products are shrink wrapped inside of the hard hat and ready to hand out at a moments notice.

PROFAST KIT INCLUDES:

OMEGA II® CAP



Molded from high density polyethylene for maximum protection. Secure-Fit ratchet features an easy turn knob. Adjusts to over 40 different head sizes, 6.5 - 8 Made in USA and meets ANSI Z89.1 Type 1, Class C, E & G requirements

IPROTECT® SAFETY GLASSES



IProtect. 9.5 base curve offers great wrap around protection. No hard coating on lens. Polycarbonate lens offers 99% UV protection.

REFLECTIVE SAFETY VEST



Adjustable hook and loop front closure. Elastic side straps. 1" reflective stripes on front and back. Does NOT Meet the requirements of ANSI/ISEA 107. One size fits most.

FOAM CORDED EAR PLUG



Non-allergenic corded foam ear plugs provide long term comfort. Convenient packaging for on-site distribution Each pair of plugs is individually wrapped.

13 GAUGE NYLON KNI SANDY FINISH



13 gauge gray nylon with spandex liner.



PROFAST

PROFASTINC.COM | 1.800.243.3418

PHILADELPHIA BRANCH

701a Ashland Ave. Bay 103
Folcroft, PA 19032
Phone: 610-521-3404
Fax: 610-521-4717

HARRISBURG BRANCH

7917 Derry St.
Harrisburg, PA 17111
Phone: 717-458-5610
Fax: 717-458-5613

PITTSBURGH BRANCH

770 Vista Park Dr.
Pittsburgh, PA 15205
Phone: 412-259-8449
Fax: 412-291-3188

BALTIMORE BRANCH

717 Hammonds Ferry Rd.
Linthicum Heights, MD 21090
Phone: 410-589-3369